



U.S. Department
of Transportation
Federal Aviation
Administration

Advisory Circular

Subject: AIRWORTHINESS APPROVAL OF
LORAN-C NAVIGATION SYSTEMS FOR USE
IN THE U.S. NATIONAL & AIRSPACE
SYSTEM (NAS) AND ALASKA

Date: 8/24/88
Initiated by: AIR-120

AC No: 20-121A
Change:

1. **PURPOSE.** This advisory circular establishes an acceptable means, but not tie only means, of obtaining airworthiness approval of a Loran-C navigation system for use under VFR (visual flight rules) and IFR (instrument flight rules) within the conterminous United States, Alaska, and surrounding United States waters. Like all advisory material, this advisory circular is not, in itself, mandatory and does not constitute a regulation. It is issued for guidance purposes and to outline one method of compliance with airworthiness requirements. As such, the terms "shall" and "must" used in this advisory circular pertain to an applicant who chooses to follow the method presented. The guidelines in this Advisory Circular supersede those of AC 90-45A, Approval of Area Navigation Systems for Use in the U.S. National Airspace System, for Loran-C navigation equipment.

2. **CANCELLATION.** Advisory Circular (AC) 20-121, Airworthiness Approval of Airborne Loran-C Systems for Use in the U.S. National Airspace System, dated August 23, 1984, is canceled.

3. **RELATED FAR.** Federal Aviation Regulations (FAR) Parts 23, 25, 27, 29, 43, and 91.

4. **RELATED READING MATERIALS.**

a. Federal Aviation Administration (FAA)/Technical Standard Order (TSO) C60b, Airborne Area Navigation Equipment Using Loran-C Inputs. Copies may be obtained from the Department of Transportation, FAA, Aircraft Certification Service, Aircraft Engineering Division (AIR-120), 800 Independence Avenue, S.W., Washington, DC 20591.

b. Radio Technical Commission for Aeronautics (RTCA), Document No. DO-160B, Environmental Conditions and Test Procedures for Airborne Equipment, Document No. RTCA/DO-178A, Software Considerations in Airborne Systems and Equipment Certification, and Document No. RTCA/DO-194, Minimum Operational Performance Standards for Airborne Area Navigation Equipment using Loran-C Inputs. Copies may be purchased from RTCA Secretariat, One McPherson Square, Suite 500, 1425 K Street, N.W., Washington, DC 20005.

c. Advisory Circular 90-82, Random Area Navigation Routes. Copies may be obtained from the Department of Transportation, Utilization and Storage Section, M-443.2, Washington, D.C. 20590.

d. **Advisory Circular 27-1, "Certification of Normal Category Rotorcraft."** This document should be referenced to determine if considerations 'beyond those contained in this advisory circular are necessary when installing a Loran-C area navigation system in a **normal category** rotorcraft. If necessary, AC 27-1 will address those items peculiar to rotorcraft installations. **Copies may be ordered from:** Superintendent of **Documents, U.S. Government** Printing Office, **Washington, DC 20402**, or from any of the **Government** Printing Office bookstores located in **major cities** throughout the United States. Identify the publication as AC 27-1, **Certification of Normal Category Rotorcraft**, Stock Number **050-007-00708-6**.

e. **Advisory Circular 29-2, Certification of Transport Category Rotorcraft.** This document should be referenced to determine if considerations beyond those contained in this advisory circular are necessary when installing a **Loran-C area** navigation system in a transport category rotorcraft. If necessary, AC 29-2 will address those items peculiar to rotorcraft installations. **Copies** maybe obtained from the **Department** of Transportation, Utilization and Storage Section M-443.2, Washington, D.C. 20590.

5. BACKGROUND.

a. System Description. Loran-C is a radio navigation **system** which uses **time** synchronized pulsed signals from ground transmitting stations spaced several hundredmiles apart. The stations are configured in chains of three to five stations which transmit with the **same** pulse group repetition interval (**GRI**). Within each chain, one station is designated as master and the **remainder** as secondaries. The master has unique pulse and phase transmission characteristics to distinguish it from the secondaries. Loran-C position is derived by measuring the difference in arrival time of pulses from three or **more** ground stations, The U.S. Coast Guard (**USCG**) presently uses a **homogeneous** spheroid for the **earth model** for the **Loran-C** system based on the **World Geodetic System, 1972 Datum (may** be updated to **1984 Datum)**, and the Defense Mapping Agency Sea Water Propagation **Model** for the propagation model. **Navigational** values such as distance and 'bearing to a **waypoint** are **computed** from the aircraft latitude/longitude and the location of the waypoint. Course guidance is generally provided as a linear deviation **from** the desired track of a Great Circle Course. The desired **course may** be pilot selectable or **may** be determined by the navigation computer by computations based on the locations of **successive waypoints**.

b. System Availability and Reliability.

(1) Loran-C navigation predicated on hyperbolic lines of position originating from a single chain may not be suitable for **IFR** use throughout the entire continental **United States** and northern **Alaska**. Equipment utilizing **master** independent, cross chain, and/or multiple chain receivers have been approved for **IFR** use in areas where single chain receivers are unacceptable.

(2) Loran-C system status is available through the Notice to Airmen (**NOTAM**) system.

Loran-C status information is also available by means of telephone data service (300 or 1200 baud, ASCII) from the U.S. Naval Observatory, telephone (202) 653-1079. Loran-C ground transmitter reliability exceeds 99 percent annually.

(3) Expansion of Loran-C coverage and improvements in signal integrity are presently being jointly accomplished by the FAA and USCG.

c. Loran-C Position Errors. The accuracy of Loran-C navigation can be degraded by various factors. Errors are caused by the slower signal propagation over land and fresh water than over sea water. These errors appear to be quite constant over distances of up to several miles. The effect of these errors is a shift or bias in the computed latitude/longitude in the local area. Use of another triad in the same area may produce a different bias value. Area calibration procedures may reduce the effect of these bias errors. Errors can also be caused by weather fronts, abrupt changes in terrain, noise, and geometric considerations, among others. These effects can be minimized by incorporation of propagation models and other correction factors which substantially reduce these errors automatically.

d. General Operational Limitations.

(1) En Route and Terminal National Airspace System (NAS) Use. A Loran-C system may be approved for en route and terminal navigation VFR or IFR within the conterminous United States and Alaska. Other navigation equipment (i.e., Very High Frequency Omni Range (VOR), Distance Measuring Equipment (DME), Tactical Air Navigation (TACAN), Automatic Direction Finder (ADF)) appropriate to the ground facilities along the intended route to be flown should be installed and operable. En route and terminal accuracy requirements must be met without the need for operator entry of calibration or correction factors.

(2) Approach Use in the NAS. A Loran-C system may be approved for instrument approach operations within the conterminous United States and Alaska provided the installed system meets the minimum performance requirements of TSO-C60b. Operator entry of calibration or correction factors shown on a charted instrument approach procedure may be used in satisfying approach accuracy requirements.

(3) IFR Navigation Equipment. Aircraft employing Loran-C for IFR navigation should also be equipped with an approved alternate means of navigation.

(4) Loran-C Operational Areas. Operational use of the Loran-C system may be limited to specified Loran-C Operational Areas (LOA's) because of system characteristics and other factors affecting system performance. Loran-C operation should be limited to those geographic areas where the equipment has been demonstrated to meet the performance specifications of this advisory circular.

6. DEFINITIONS.

a. Approach Operations. Approach operations are those flight phases conducted on charted Instrument Approach Procedures (IAP's) commencing at the

initial approach fix (IAF) and concluding at landing or the missed approach holding fix, as appropriate.

b. Area Calibration. Area calibration is a procedure where **time measurement** correction factors are input into the **Loran-C** system to reduce the effect of propagation anomalies.

c. Baseline. A line **between** a Loran-C **master** station and one of its secondary stations or between two secondary stations.

d. Baseline Extension. The extension of the baseline beyond the **master** or secondary station. Navigation in this region may be inaccurate due to **geometrical** considerations resulting in **ambiguous** position solutions.

e. Blink. A method of indicating non-standard operation of a Loran-C station be **switching** off and on the ninth pulse of an affected master station or the first **two** pulses of an affected secondary station. **Blink** is used to denote that a station is operating outside of specified tolerances.

f. Cycle Slip. Erroneous use of an incorrect cycle of the **100 kHz** carrier of the **Loran-C** signal for **time measurements**. Normally the third cycle of a given pulse is used for **time measurement**. Each cycle slip will result in a **10** microsecond error in **time measurement** and a corresponding error in navigation.

g. En Route Operations. En route operations are those flight phases conducted on charted **VOR** routes designated as high or low altitude routes (Jet or Victor), direct point-to-point operations **between** defined **waypoints**, or along great circle routes as **described** in Advisory Circular **90-82**, Random Area Navigation Routes.

h. Envelope-to-Cycle Discrepancy (ECD). The discrepancy between the desired and actual zero phase crossing at the end of the third cycle of the **Loran-C** pulse. U.S. Coast Guard specifications for the **Loran-C** transmitted signal provide a further definition of **ECD**.

i. Geometric Dilution of Precision (GDOP). A factor used to express navigational error at a position fix caused by divergence of the hyperbolic lines of position as the receiver's (**aircraft's**) distance from the baseline increases.

j. Group Repetition Interval (GRI). The **time interval (measured in tens of microseconds)** between one group of pulses and the next from any transmitter within a **Loran-C** chain. **All** stations in a specific chain use the **same GRI**.

k. Group Repetition Rate (GRR). The **reciprocal** of the **GRI** (usually **measured** in groups per second),

l. Line of Position (LOP). A hyperbolically curved line defined by successive but constant **time** difference (**TD**) **measurements** using the signals from **two** **Loran-C** transmitters. **Two** crossing **LOP's** define a **receiver's** location, thus at least three **Loran-C** stations must **be** used to establish a position fix.

- m. Master Dependent Mode. A Loran-C operating mode where all time difference measurements are executed with reference to the master's pulses.
- n. Master Independent Mode. An operating mode used in some receiver designs in which a secondary station signal may be substituted for the master station signal.
- o. Precipitation Static (P-Static). P-static is electromagnetic noise generated by the dissipation of an electrical charge from an aircraft into the atmosphere. The aircraft becomes charged by flight through particles suspended in the atmosphere such as dust, ice, rain, or snow. Unprotected aircraft may create so much noise that the Loran-C receiver can no longer detect the transmitted signal.
- p. Skywave. Loran-C signal energy traveling such that it is reflected by the ionosphere. Skywaves travel farther than the ground wave to reach a given point and can interfere with ground wave reception at some locations.
- q. Time Difference (TD). The elapsed time, in microseconds, measured at the receiver (aircraft), between the arrival of a set of pulses from one Loran-C station's signal to the arrival of a set of pulses from another station's signal.
- r. Triad. The collective name given to the three stations from a Loran-C chain from which navigational information is being derived.
- s. Terminal Area Operations. Terminal area operations are those flight phases conducted on charted Standard Instrument Departures (SID's), on charted Standard Terminal Arrivals (STAR's), or other flight operations between the last en route fix/waypoint and an initial approach fix/waypoint.

7. AIRWORTHINESS CONSIDERATIONS. Loran-C navigation systems have been certified for VFR and IFR use as an area navigation system for en route and terminal navigation in the NAS. This paragraph establishes acceptable criteria for Loran-C systems,

a. Loran-C Installations Used for Operations Under Visual Flight Rules (VFR) Only. Operators wishing to use Loran-C for operations limited to VFR may obtain approval of the installation by Type Certificate (TC), Supplemental Type Certificate (STC), data field approved by the FAA on an FAA Form 337, Major Repair and Alteration, or by the use of previously approved data. The approval for return to service should be signed by one of the entities noted in FAR 43; i.e., repair station, manufacturer, holder of an inspection authorization, etc. The installation verification should ensure, but is not limited to, the following:

(1) The Loran-C Installation Does Not Interfere with the normal operation of other equipment installed in the aircraft. This is accomplished by a ground test and flight test to check that the Loran-C equipment is not a source of objectional electromagnetic interference (EMI), is functioning properly and safely, and operates in accordance with the manufacturer's specifications.

(2) The Structural Mounting of the Loran-C Equipment is sufficient to ensure the restraint of the equipment when subjected to the **emergency landing** loads **appropriate** to the aircraft category.

(3) A Navigation Source Annunciator is Provided on or adjacent to the display if the **Loran-C** installation **supplies** any information to displays such as a horizontal situation indicator (**HSI**) or course deviation indicator (**CDI**) which can also display **information** from other systems **normally** used for aircraft navigation.

(4) The Loran-C Controls and displays are Installed with a placard(s) which states "**Loran-C Not Approved for IFR.**"

(5) The Loran-C May Be Coupled to the "Radio Nav" Function of an autopilot provided the system has a **CDI** or steering output that is **compatible** with the autopilot, and the same **installation** procedures normally used for the **VOR** coupling are used.

b. Loran-C Installations Used as an Area Navigation System Under Instrument Flight Rules (IFR). The standards for navigation within the **NAS** are **more** stringent than the **requirements** for long-range, **over-water** navigation. **Loran-C** equipment produced under **TSO-C60a** is not necessarily appropriate for en route area navigation under **instrument** flight rules since this technical standard order was originally written for long-range, over-water navigation. Minimum **performance** standards for **Loran-C** equipment to be used in the **NAS** are specified in **TSO-C60b**. Equipment previously certified using **TSO-C60a** and **AC 20-121/AC 90-45A** may **continue** to be approved for en route and terminal operations provided the appropriate performance standards are satisfied. Equipment approved for non-precision approaches must have **TSO-C60b** approval and meet specified minimum performance standards. Criteria for area navigation (**RNAV**) systems based on **Loran-C** navigation are amplified in the* following paragraphs. The initial certification of a **Loran-C** system requires an engineering evaluation because of the need to verify accuracy, failure indications, approved **operating** areas, **environmental** qualifications, etc. Subsequent installations of the **same Loran-C** system in other aircraft **may** require additional engineering evaluation, depending **upon** the degree of integration of the **Loran-C** system with other aircraft **systems**. An engineering evaluation will be necessary to change or increase approved operating areas. **Loran-C** systems for use under **instrument** flight rules should provide the following:

(1) Flightcrew Inputs of:

(i) Aircraft present position in **terms** of latitude and longitude at least to the nearest **0.1 minute**.

(ii) For en route operations, at least three (for to-from **equipment**) or four (for to-to **equipment**) **waypoint** positions in terms of latitude and longitude at least to the **nearest 0.1 minute**.

(iii) For terminal and approach **operations**, at least eight (for to-from **equipment**) or nine (for to-to **equipment**) **waypoint** positions in **terms** of latitude and longitude to at least the nearest **0.1 minute**.

(iv) A **means** to confirm correctness of input data prior to utilization of the new data by the system.

(v) A "**direct to**" function to define a route **segment** from present position to any **waypoint**.

(vi) Chain (**master** and **secondary**) and **GRI** designation if the **system** requires **manual** designation.

(vii) A **means** for manual update of system position by the pilot to permit insertion of a known present position.

(2) The System Displays Should Give No Operationally Misleading Information and Should Provide.

(i) Present position in terms of latitude and longitude to at least the nearest **0.1** minute and in **terms** of magnetic bearing and distance to or from a **waypoint** to at least the nearest **0.1** nautical mile (**nmi**) and nearest degree. Distances of at least **260 nmi** should be capable of being displayed, but distances greater than **99.9 nmi** need only be displayed to the nearest **1.0 nmi**.

(ii) **Waypoint** position designation in terms of latitude and longitude to at least the nearest **0.1** minute or in terms of magnetic bearing and distance from present position or another **waypoint**. **Waypoint** designation in **terms** of magnetic bearing and distance should be to at least the nearest degree of bearing and **0.1 nmi** for distances up to **100 nmi** then at least **1.0 nmi** for distances of **100 nmi** or **more**.

NOTE: Information should be provided to the flight crew to prevent the designation of waypoints by a **sequence** of bearings and distances (i.e., the reference position for a **waypoint** designated by bearing and distance should be designated by latitude and longitude),

(iii) A display of active **waypoint(s)** identification (**not** necessarily **waypoint** position) used to define the navigation track 'being flown.

NOTE: Only systems which define the desired navigation track in terms of its endpoints can be used to navigate on published airways due to changes in magnetic variation after the **commissioning** of the ground facility.

(iv) A display of the desired track in terms of the appropriate **magnetic** course to at least the nearest **1.0** degree. Display of the appropriate magnetic course should not require the flightcrew to input the magnetic variation corresponding to the present position.

(v) A display of the distance to the active **waypoint** to the nearest **0.1 nmi**. Distances of at least **260 nmi** should be capable of being displayed, but distances greater than **99.9 nmi** need only be displayed to the nearest **1.0 nmi**.

(vi) A continuous analog (i.e., **nonnumeric**) display of crosstrack deviation with

	<u>En Route/Terminal</u> (nmi)	<u>Approach</u> (nmi)
Minimum Full-Scale Deflection	≥5.0	* ≥1.25
Readability	≤1.0	≤0.25
Minimum Discernable Movement	≤0.1	≤0.05

* **NOTE:** Smaller values of minimum full-scale deflection for approach may be acceptable provided the proposed value is found satisfactory by an engineering evaluation.

(vii) A display of crosstrack deviation to the nearest 0.1 nmi up to 9.9 nmi and 1.0 nmi beyond, with a range of at least +20 nmi. This may be a digital display, may be pilot selectable, and need **not** be part of the course deviation indicator.

(viii) A display of the distance **and** magnetic bearing (at the "from" end of the **segment**) between waypoints to at least the nearest 1.0 nmi and 1.0 degree.

(ix) The capability to indicate, on **demand**, the specific **Loran-C** stations **currently** used in the navigation calculations as well as the status of all stations being tracked.

(x) An annunciation of impending **waypoint** crossing.

(3) Caution Indication(s) for the System Should be **Located** on or near the indicator **specified** in paragraph 7b(2)(f) and should provide a readily discernible caution indication(s) to the pilot(s) for any of the following:

(i) **Inadequate** or invalid navigation signals or sources.

(ii) The absence of primary power.

(iii) **Inadequate** or invalid navigation displays or output sources. In the approach **mode**, the inability to assure navigation position data accurate to within **+0.3 nmi**.

(iv) Equipment failures.

(v) Reversion to a secondary dead reckoning **mode** of navigation.

NOTE: These failure/status indications shall occur independently of any operator action. Power or navigation equipment **failures may be indicated** in a **common manner**. The lack of **adequate** navigation signals or sources (considering signal-to-noise ratio (SNR) as well as **geometry**) should be annunciated when compliance with the navigation accuracy specified in paragraph 9 cannot be assured, In the approach **mode**, the lack of adequate navigation signals or

sources shall be annunciated by means of a flag displayed on the **primary** navigation display. In other **modes**, an appropriately located annunciator **may** be used.

(4) When Within an Acceptable LOA, the system shall be able to **prop-**
erly acquire and track signals and provide navigation to the accuracies **speci-**
fied in paragraph 9 under the conditions and within the time limits specified in **TSO-C60b**.

(5) Navigation Guidance Should be Available within 5 seconds of **waypoint** data input. .

(6) The Equipment Should Have The Capability to met the criteria out-
lined in paragraph **7b(1)** through **7b(5)** throughout the range of **environmental**
conditions which will be encountered in actual service. Exposure of the equip-
ment to the **environmental** test conditions of **TSO-C60b** **may** be used to **demonstrate**
this capability. Environmental testing to obtain a **TSO-C60a** authorization may
be used provided that the test results also **demonstrate compliance** with the
criteria of paragraph **7b(1)** through **7b(6)**.

(7) The Equipment Should Provide a Means for the Flightcrew to determine
system status prior to flight.

(8) The Equipment Should Not Exceed the Error Values specified in para-
graph 9 for all groundspeeds up to a **maximum value** to be set by the **manufacturer**
and should provide usable navigation information necessary for holding patterns
conducted with standard rate turns at speeds up to **250 knots** groundspeed or at a
lesser value specified by the **equipment** manufacturer.

(9) The Equipment Should Provide Means to Alert the Flightcrew prior to
arrival at a **waypoint** to permit turn anticipation in accordance with the approx-
imate formula of **1.0 nmi** for each **100** knots of groundspeed. This indicator
should be located on or **near** the indicator specified in paragraph **7b(2)(f)**. For
Loran-C system **which** are not **coupled** to a flight director or autopilot, a pro-
cedural **means** based on a continuous and properly located distance to **waypoint**
display **may** be used for **waypoint** lateral **maneuver** anticipation. **Systems** which
provide steering signals for flight directors or autopilots should provide **auto-**
matic turn anticipation and a **waypoint** alert **which** occurs **prior** to the
initiation of the turn by the flight director or autopilot.

(10) If a Capability for Parallel Offset Tracks is Provided, track selec-
tion should be in increments of at least **1.0 nmi** left or right up to an offset
of at least **20 nmi**. **Means** should be provided to continuously indicate that an
offset track has been selected. **Waypoint** alerting and turn **anticipation** should
be provided **prior** to arrival at the **point** where the off set intersects the angle
bisector of the parent track. These functions should operate as **described** in
paragraph **7b(9)**.

c. Software Changes. The provisions of this paragraph apply to **Loran-C**
equipment which utilizes a **digital computer** to provide navigation inform&ion or
system **monitoring**. The **computer** program (software) operates the computer and
provides the basic functions of these systems. **The** software for navigation

functions of **Loran-C equipment** described in paragraph 7b (for Loran-C used for IFR operations) should be verified and validated to at least the level 2 requirements as defined by RTCA/DO-178A, "Software Considerations in Airborne Systems and Equipment Certification." Any changes to software which affects navigational functions are considered to be major changes to the **equipment**. Unless software partitioning has been previously established, any change to level 1 or level 2 software of **Loran-C area navigation equipment** should be verified and validated to the appropriate level and should be demonstrated as not having inadvertently affected the remaining navigational functions. changes to software used for **Loran-C equipment** limited to VFR use or **equipment** having established partitioning from software which provides navigational functions in **IFR systems** are considered to be minor and do not require prior approval by the FAA, providing the manufacturer of the **Loran-C equipment** has a software configuration management and quality assurance plan approved by the FAA. **Software** status must be identified on the **outside** of the associated line replaceable unit in accordance with the criteria of RTCA/DO-178A. Software change in **TSO approved equipment** must be reported to the cognizant Aircraft Certification Office. If the **equipment** displays a software identifier to the flightcrew, the airplane or rotorcraft flight manual (or appropriate placard) should indicate the approved identifier. Software changes incorporated in **equipment** already installed in an aircraft may require additional evaluation and possible flight manual supplement revision prior to returning the aircraft to service, depending upon the scope of the change.

8. EQUIPMENT INSTALLATION CONSIDERATIONS FOR USE UNDER IFR.

a. Location of the Loran-C Display. Each display element, used as a primary flight instrument in the guidance and control of the aircraft, for maneuver anticipation, or for failure annunciation, should be located where it is clearly visible to the pilot (in the pilot's primary field of view) with the least practicable deviation from the **pilot's normal** position and line of vision when looking forward along the flight path.

b. Failure Protection. Any probable failure of the airborne **Loran-C** navigation system should not degrade the **normal** operation of other required equipment or create a flight hazard. Normal operation of the **Loran-C** installation should not adversely affect the **performance** of other aircraft **equipment**.

c. Environmental Conditions. The aircraft **environment** in which the **Loran-C** system is installed should be found to be compatible with **environmental** categories to which the **equipment** was tested.

d. Electromagnetic Interference. The **Loran-C** navigation system should not be the source of objectionable **electromagnetic** interference, nor be adversely affected by **electromagnetic** interference from other **equipment** in the aircraft.

e. P-Static Protection. If an E-Field antenna (whip, plate, or blade type) is used, the aircraft should be protected by placing the antenna in a suitable location, by acceptable bonding techniques and installation of static dischargers. These protective devices should be specified as part of the approved

design data for the **Loran-C** installation. The capability to provide satisfactory P-static protection for the **Loran-C** system should be demonstrated as part of the initial certification program. This testing may be **accomplished** by ground or static testing if sufficient data is provided to **demonstrate** that the proposed technique is equivalent to flight testing. If a flight **demonstration** is selected, it must be conducted at speeds up to V_{ne} , V_{mo} , or M_{mo} through **known** P-static conditions such as a cloud of ice crystals* **Momentary** loss of signal when encountering heavy P-static conditions **may** be acceptable provided the **equipment** is capable of providing acceptable navigation information during such conditions.

(1) P-Static Charging/Discharging. P-static charging of the aircraft can cause degradation of the **signal-to-noise** ratio by one of three major **mechanisms**: sparkover of isolated metal panels, corona discharge, and **streamer** currents. Sparkover of isolated **metal** panels can be handled by appropriate bonding. This bonding needs to occur on all control, and trim surfaces as well as isolated access panels. **Bondings should be evaluated by a careful ohmic survey** (an electrical bonding limit of **10 millionms** is considered acceptable) of each aircraft in which the **Loran-C** system is installed or by other suitable techniques. The effects caused by **streamer** currents can be reduced by placing the receiving antenna as far as possible from any nonconductive surfaces such as windshields. The **nonconductive surfaces** may be **coated** with a conductive coating. **Temporary** spray coatings are not satisfactory. Corona discharge can be reduced by the appropriate placing of **orthodecoupled** static dischargers on the extremities of the aircraft. A number of recent studies have shown that the frayed-wick types of discharger rapidly lose their effectiveness as a result of use. Therefore, dischargers constructed with a high resistance rod and **metal** pins are **recommended** although other types may also be used if they can **demonstrate** ability to provide protection from radio **frequency (RF)** coupling to the **Loran-C** antenna. The number, type, and location of these static dischargers to be installed on a particular aircraft **model** should be determined by following the instructions provided by the **manufacturer** of the static discharger for P-static protection.

f. Anti-Ice Protection. If the aircraft in which the **Loran-C** system is installed is approved for flight into known icing conditions, the antenna should have anti-ice protection or be found not to be susceptible to ice buildup. Alternatively, if the **Loran-C** system can be **shown** to operate satisfactorily when the antenna is subject to icing, or if the system is limited via placard or flight **manual** to indicate that it is not to be used for navigation during flight in icing conditions, then anti-ice protection is not **required**.

g. Dynamic Responses. The system shall continue to indicate aircraft position **to the** accuracy specified in paragraph 9 within **15** seconds following aircraft maneuvering or changes in attitude encountered in normal operations.

h. System Controls. The system controls should be arranged to provide **adequate** protection against inadvertent system **turnoff**. The controls for system operation should be readily accessible to, and usable by, the flightcrew and be visible under all expected lighting conditions, including night and direct sunlight.

i. System Tests. The initial approval of a **Loran-C** system for **IFR** use involves extensive testing to **demonstrate** system **performance**, operational areas, **environmental** qualifications, etc., as described in paragraph **7b(6)**. Subsequent installations in other aircraft need only be tested to the extent necessary to **demonstrate** proper operation of interfacing aircraft **equipment** such as autopilots, flight directors and instrument displays, satisfactory antenna installations as evidenced by the reception of **Loran-C** signals during **normal** flight maneuvers, satisfactory clearance of electromagnetic interference (**EMI**), and functional check of the **Loran-C** equipment.

7 Manufacturer's Instructions. **Loran-C** equipment should be installed in accordance with instructions and limitations provided by the **manufacturer** of the **equipment**.

k. Approach Mode Limitation. **Loran-C** equipment capable of selecting an "approach" mode on the control panel shall be placarded "Approach Mode Not Approved for **IFR**," unless the **equipment** is approved for conduct of **Loran-C** nonprecision instrument approaches.

9. SYSTEM ACCURACY.

a. En Route IFR Operation Along Random (Off Airways) RNAV routes with Radar Coverage. The error of the airborne **Loran-C** equipment should be less than **+3.8 nmi** of crosstrack error on a **95** percent probability basis and **+3.8 nmi** of along-track error on a **95** percent probability basis.

b. En Route IFR Operation on Airways in the NAS. The error of the airborne **Loran-C** equipment should be less than **+2.8 nmi** of crosstrack error on a **95** percent probability basis and **+2.8 nmi** of along-track error on a **95** percent probability basis for approval of en route **IFR** operations on airways.

c. Terminal IFR Operation in the NAS. The error of the airborne **Loran-C** equipment should be less than **+1.7 nmi** of crosstrack error on a **95** percent probability basis and **+1.7 nmi** of along-track error on a **95** percent probability basis for approval of **terminal IFR** operations.

d. Instrument Approach Operation in the NAS. The error of the airborne **Loran-C** equipment should be less than **+0.3 nmi** of crosstrack error on a **95** percent probability basis and **+0.3 nmi** of along-track error on a **95** percent probability basis for approval of **instrument** approach operations.

e. Flight Technical (Pilotage) Errors. With satisfactory displays of crosstrack position, the FAA has **determined** that flight technical errors can be expected to be less than the values shown below on a **two-sigma** basis.

<u>Flight Condition</u>	<u>Flight Technical Error</u>
En route	+1.0 nmi
Terminal	+1.0 nmi
Approach	+0.5 nmi

Sufficient flight tests of the installation should be conducted to verify that **these values can be maintained**. **Smaller** values for flight technical errors should not be expected, unless the **Loran-C** system is to be used only when coupled to an autopilot; however, at least the total system crosstrack accuracy shown below should be maintained,

If an installation results in larger flight technical errors, the total **cross-track** error of the **system** should be determined by **combining equipment** and flight technical errors using the root sum square (**RSS**) method. The result should be less than the values listed below.

<u>Flight Condition</u>	<u>Total CrossTrack Error</u>
Random RNAV Routes	<u>+4.0 nmi</u>
En route, on Airways	<u>+3.0 nmi</u>
Terminal	<u>+2.0 nmi</u>
Approach	<u>+0.6 nmi</u>

10. IFR AIRWORTHINESS APPROVAL. There are two types of approval which differ greatly as to test **requirements** and data analysis.

a. **First-Time Airworthiness Approval.** This type of approval refers to the very first **time** an applicant presents a particular **model Loran-C equipment** for FAA airworthiness installation approval and certification for an **IFR** navigation system. **Any new models of Loran-C equipment by the s-manufacturer should undergo** the same approval process as the original **equipment unless** it can be shown by analysis and tests that the new **model** will function as well or better than the approved **equipment**. A first-time approval is conducted in three phases:

(1) **Lab/Bench Tests and Equipment Data Evaluation.** This phase consists of the following:

(i) Analysis of the **manufacturer's** procedures for verification and validation of software and review of **supporting documentation** in accordance with the guidelines of **RTCA/DO-178A** where the system performs navigational functions.

(ii) Verification of compliance with appropriate **environmental** qualification standards such as **RTCA/DO-160B**.

(iii) Examination of the **equipment's** display capabilities with emphasis on warning, caution, and advisory annunciations.

(iv) Analysis of failure **modes**.

(v) Review of reliability data to establish that all probable failures are detected.

(vi) Evaluation of the **ease** of use of the controls and of the viewing ease of the displays and annunciations from a **human** factor point of view.

(vii) Review of installation and **maintenance** manuals.

(viii) Evaluation of operator% **manual** (pilot% guide).

(2) Aircraft Installation Data Evaluation. **Normally** the **manufacturer** of the Loran-C **equipment** will provide an aircraft as a test bed for a first-time installation approval. **This** first-time installation approval will serve as a basis for any subsequent installation approvals regardless of aircraft type or **model**. The following assessments are to be **made**:

(i) Review of installation drawings, wiring diagram, and descriptive wiring routing.

(ii) Evaluation of the cockpit layout of the install& **equipment** with **emphasis** on **equipment** controls, applicable circuit breakers (labels and accessibility), switching **arrangement** and related indicators, displays, annunciators, etc.

(iii) Analysis of a data flow diagram in order to review which **equipment** transmits what data to **which** other **equipment**.

(iv) Review of a structural analysis of the **equipment** installation in order to ascertain whether all **Loran-C components** are satisfactorily attached to the **basic** aircraft structure.

(v) Examination of an electrical load analysis **in order** to verify that the added electrical power **requirements** of the **Loran-C** installation will not cause overloading of the aircraft's electrical generating capacity.

(vi) Evaluation of the antenna installation. **A** critical aspect of any Loran-C installation is the installation of the antenna. **The Loran-C signal** is quite weak, typically **only** one-third the value of the background noise. Electrical noise in the vicinity of the **antenna** can render the Loran-C **equipment** useless,

(A) E-Field **antenna** (whip, plate, or blade type). Precipitation static has an **adverse** effect upon the signal receiving capability of this type of antenna. The adverse effects of precipitation static can be minimized by use of the proper antenna **type** and location, by installation of **high-quality** static dischargers, by proper bonding, and by application of anti-static paint on all plastic nonconducting surf aces. The manufacturer% installation or **maintenance manual usually** describes "**good**" E-Field antenna installation practices.

NOTE: Each aircraft should 'be subjected to a careful ohmic survey of bonding (an electrical bonding limit of **10 milliohms** is considered acceptable). The P-static protection is a required part of the **Loran-C** installation and must be maintained for proper system operations.

(B) H-Field antenna (loop type). The signal receiving quality of this type of **antenna** is adversely affected by aircraft electrical skin currents, particularly by **400 Hz ac**. P-static has no appreciable effect on an H-Field antenna, and its effects can usually be ignored. A procedure called "**skin mapping**" is **normally employed** to determine a good mounting location. It

should be noted that shifting major aircraft electrical components to different locations within the aircraft may render a previously determined skin map location unsuitable.

NOTE: The following is a simple test to verify the effectiveness of an H-Field antenna installation located by skin mapping. Park the aircraft away from any external electrical noise source. Using only the aircraft's battery, and with all other electrical equipment off, activate the Loran-C equipment and record signal-to-noise values (or quality factors) for all receivable stations. Repeat this process of recording signal-to-noise values (or quality factors) with engine(s) running and all electrical/electronic equipment operating on aircraft power. If the antenna installation is satisfactory, there should not be any significant degradation in signal-to-noise ratio values or quality factors.

(3) Flight Test Evaluations. Flight tests are conducted in two stages.

(i) Functional Flight Tests Consist of:

- (A) Evaluation of all operating modes of the Loran-C equipment.
- (B) Examination of the interface (function) of other equipment connected to the Loran-C equipment.
- (C) Review of various failure modes and associated annunciations such as loss of electrical power, loss of signal reception, Loran-C equipment failure, etc.
- (D) Evaluation of steering response while autopilot is coupled to the Loran-C equipment during a variety of different track changes.
- (E) Evaluation of displayed Loran-C navigation parameters on interfaced flight-deck instruments such as HSI, CDI, etc.
- (F) Assessment of all switching and transfer functions pertaining to the Loran-C installation including high-power electrical loads and electrical bus switching.
- (G) Evaluation to determine whether there exists any electromagnetic or radio frequency interference between the Loran-C installation and other onboard equipment, or vice versa.
- (H) Evaluation of the accessibility of all controls pertaining to the Loran-C installation.
- (I) Evaluation of the visibility of the displays and annunciators pertaining to the Loran-C installation during day and night lighting conditions. No distracting cockpit glare or reflections may be introduced.
- (J) Analysis of crew workload when operating the Loran-C equipment.

(ii) Determination of Navigation Error Flight Test. The initial certification of each **Loran-C** system to be used for **IFR** operations should be based on a **demonstration** of **system** performance by **recording** the **Loran-C equipment** position and comparing it to the actual position of at least **100** locations distributed throughout the **Loran-C** operational area. These measures should be recorded in flight by overflight of a known ground reference point at low altitude (less than **3,000'** above ground level (**AGL**)) or comparison with a good multiple **DME** fix. The data should **demonstrate** that the appropriate accuracy criteria of paragraph 9 are **met** on a **95** percent probability basis. Flights into known poor signal areas should be conducted to verify that the caution indications for bad **geometry** and poor signal quality function properly. A ground or flight test for P-static protection, if appropriate, should be conducted. Normal flight **maneuvers** should not cause loss of the **Loran-C** signal and the **system dynamic response should be confirmed.** Any unusual flight technical errors or errors resulting from use of the autopilot and flight directors should be **evaluated and examined.** For receivers that track only one chain at a time, at least **50** percent of the accuracy **measurements** should be **accomplished** at or near the **extremes** of each defined **LOA.** For **master** independent, cross chain, and multi-chain receivers, at least **50** percent of the accuracy **measurements** should be accomplished at or near the **extremes** of the **combined** chain coverage area. At these points, the system should also **demonstrate** its ability to **acquire** the **Loran-C** signal after power interruption.

b. Follow-On Airworthiness Installation Approvals. This type of approval refers to installation approvals in any **model** or **type** of aircraft after a first-time **airworthiness** approval of the particular **Loran-C equipment** has been issued. Follow-on approvals may use the first-time **airworthiness** approval, which was either a **TC** or an **STC**, as a basis for installation approval. Follow-on installation approvals may be **accomplished** by **TC** or **STC**, or may be in the form of a field approval on an FAA Form **337.** The applicant or installing agency requesting a follow-on **Loran-C** installation utilizing this method of data approval should:

(1) Contact either the **manufacturer** or organization responsible for obtaining the first-time airworthiness approval in order to:

(i) Obtain a sample airplane flight **manual (AFM)** or rotorcraft flight manual (**RFM**) supplement (or **supplemental flight** manual, as appropriate).

(ii) Obtain verification of the **equipment** approval status, including the **model** of the antenna and software program identification.

(iii) Discuss any problem **areas** and seek assistance in their solution.

(2) Conduct a similar data evaluation as outlined in paragraph **10a(2).**

(3) Conduct flight evaluations similar to the flight tests outlined in paragraph **10a(3)(i).**

(4) Verify that the ohmic bonding check of the **aircraft** has been conducted and that appropriate numbers and types of static dischargers are

installed if an E-Field antenna is used, or that a skin map has determined the appropriate location for the antenna if an H-Field antenna is used.

(5) Verify that the maximum expected groundspeed of the aircraft is less than the maximum operating speed for which the Loran-C equipment is qualified.

(6) Spot-check navigation accuracy and verify proper system operation by conducting an evaluation flight. The flight test should be of sufficient length and should follow a plan which permits proper functional evaluation of the Loran-C installation. Accuracy should be verified by conducting at least two low-level overflights of known landmarks (i.e., a VOR station). (A DME-DME position fix may be substituted for one of the low-level overflights.) The receiver should demonstrate the ability to properly acquire the Loran-C signal -under varying conditions, including at least five acquisitions in flight and five on the ground. Acquisition demonstrations should encompass a variety of chains (for single chain receivers) and, if possible, poor signal quality areas. If possible, this flight should include areas of poor coverage to observe proper operation of appropriate annunciations. The purpose of this test flight is not to validate navigation error values, but rather to verify that in the course of this installation nothing was done to compromise the accuracy of the system as determined by the first-time approval. Errors in excess of the values listed in paragraph 9 should be evaluated to determine possible causes. If a logical explanation is not available, additional flight test data points should be collected in the area(s) where the excessive error occurred. If such error(s) persists, approval of the installation should be withheld.

11. OPERATIONAL CONSIDERATIONS.

a. Operation in the National -Airspace System (NAS). The aircraft should have navigational equipment installed and operating appropriate to the ground facilities to be used (not including Loran-C system). Within the conterminous United States, this requirement may be met with the installation of a VOR receiver in addition to the Loran-C system approved for IFR operation.

b. Loran-C Operational Area, Operators and their flightcrews should consult the approved flight manual supplement for their aircraft to determine approved operational areas that apply to their aircraft. Flightcrews must be aware that operational areas may be different for different Loran-C systems, and the appropriate operating area(s) for a particular system can only be determined by reference to the approved flight manual or other FAA approved documents.



M. C. Beard
Director, Aircraft Certification Service

APPENDIX 1. PROCEDURES FOR OBTAINING FAA APPROVAL FOR IFR/VFR OPERATIONS BY SUPPLEMENTAL TYPE CERTIFICATE OR FAA FORM 337 (FIELD APPROVAL FOR FOLLOW-ON INSTALLATIONS).

1. APPROVAL OF TECHNICAL DATA BY SUPPLEMENTAL TYPE CERTIFICATE (STC).

a. The STC Applicant:

(1) Makes an application for an **STC** at the nearest FAA aircraft certification office. **Early** contact is wise, since scheduling may be critical. FAA evaluates the data **submitted** by the applicant, issues a Type Inspection Authorization (**TIA**), and participates in ground/flight tests outlined in paragraph 10. An **STC** is issued when all **airworthiness requirements** are met. If the submitted data is **adequate**, the **STC** authorizes identical installations in the **same** aircraft type.

(2) Designs and installs the **Loran-C** system to the criteria set forth in applicable paragraphs of this advisory circular, or consistent **with other** data acceptable to the Administrator.

(3) Obtains an authorization from the **equipment** manufacturer to reference the original data for **equipment accuracy** (per paragraph 9), or conducts the necessary tests.

(4) Makes an aircraft available (with the **Loran-C** system installed) for ground inspection and flight test. The applicant is responsible for furnishing a qualified flightcrew for the required flight tests.

(5) Should Submit the following kinds of data for FAA **airworthiness** evaluation:

(i) **Equipment** data such as:

(A) Equipment schematics and system wiring diagram.

(B) Equipment manufacturer's operating instructions and installation instructions.

(C) Equipment manufacturer's quality control procedures (not required if **manufacturer's** quality control is FAA-approved).

(D) Environmental test data.

NOTE: Equipment data need not be submitted if the equipment has been manufactured under a technical standard order authorization.

(ii) Fault analysis covering installation.

(iii) **Installation** information and/or photographs, including antenna and P-static protection devices.

(iv) Structural substantiation as necessary.

(v) Installation wiring diagram.

(vi) Flight manual revision or **supplement**, or placard drawings as required (see paragraph 2c of this appendix).

(vii) Evidence of previously approved data.

(viii) Electrical load analysis.

b. The Equipment Manufacturer Can Certify (to the applicant and FAA) that the **performance** criteria in **paragraph 9** by reference to the original **STC** have 'been satisfied, a **TSO** has been obtained, and that the appropriate **environmental** tests have been conducted.

2. APPROVAL OF TECHNICAL DATA/INSTALLATION FOR IFROPERATIONS BY FAA FORM 337 (FIELDAPPROVAL).

a. Data Submitted by the Applicant. Alteration data for the **equipment** installation will 'be **submitted** with a properly executed FAA Form **337**, and a certification from the manufacturer to **confirm** that the system performance requirements of paragraph 9 have been **met**.

b. Additional Data Which May Be Required. If required for **FAA** airworthiness evaluation by the FAA district office approving the technical data/installation, the applicant may also be required to furnish a **copy** of the **equipment** data (for equipment not produced under a technical standard order authorization), **manufacturer's** operating and installation instructions fault analysis for installation, installation details and/or photographs, substantiation of structural changes, and system wiring diagram.

c. Airplane Flight Manual (AFM) or Rotorcraft Flight Manual (RFM) SUPPLEMENT. An AFM/RFM **supplement** (or **supplemental** flight manual) prepared by the applicant and containing the following **information** must 'be presented for FAA approval.

(1) **Equipment** operating limitations.

(2) **Emergency/abnormal** operating procedures (if applicable),

(3) **Normal** procedures for operating the Loran-C system and any interfaced equipment.

(4) Procedures for verifying proper operation after **power** outages.

d. The applicant makes an aircraft available (with the **Loran-C** system **installed**) for ground and flight tests, and is responsible for furnishing a qualified flightcrew for the required flight test. The results of the flight test should made a part of the data **submitted**. The FAA approving inspector will request to observe the flight test.

NOTE: The FAA inspector will **evaluate** and sign the airplane flight manual supplement or rotorcraft flight manual **supplement** (or supplemental flight **manual**) presented by the applicant as part of a field approval. Generally, FAA

inspectors should have sufficient understanding of the **AFM** or the **RFM** to approve a supplement for the **Loran-C** installation without the need for engineering assistance. However, if engineering assistance is needed, then the inspector should request it early in the program.

e. Field approvals of **Loran-C** installations for **IFR** should be limited to follow-on installations where the original approval was through the **TC** or **STC** process and where the system installation is either of the stand-alone kind or where the interface with autopilot, flight director, and aircraft equipment is of a **simple** nature. For **example**, a simple interface is one **which** provides a switching arrangement to substitute the Loran-C deviation and flag signals for the **comparable** outputs of one **VOR** receiver. Field approvals without engineering assistance should not be **made** when:

(1) The **Loran-C** equipment transfers or accepts data from other navigation systems or **computers** such as inertial, **Omega**, or flight **management** systems;

(2) The aircraft has numerous sources of navigation information installed with a **complex** switching **system**; and

(3) The Loran-C **equipment** incorporates a software configuration that has not been FAA approved.

3. APPROVAL OF INSTALLATION FOR VFR OPERATIONS. Approval of **Loran-C** installations for operations under **VFR** may be obtained by **TC**, **STC**, or data field approved by the FAA on an FAA Form 337. If previously approved data is available or the installation can be accomplished by utilizing provisions provided by the **airframe manufacturer** for standard avionics **equipment** installations, the installation then be approved for return to service by one of the entities noted in FAR 43; i.e., repair station, **manufacturer**, holder of an **inspection** authorization, etc., provided the installation:

a. Conform to the acceptable methods, techniques, and practices contained **ac43.13-1A**, Acceptable Methods, Techniques and Practices - Aircraft Inspection Repair and **AC 43.13-2A**, Acceptable Methods, Techniques, and Practices - Aircraft Alterations.

b. Does not interfere with the **normal** operation of other **equipment** installed in the aircraft. This is accomplished by a ground test and flight test to check that the **Loran-C** equipment is not a source of objectional electromagnetic interference (**EMI**), is functioning properly and safely, and operates in **accordan** with the manufacturer's specifications.

c. Does not involve **complex** switching for integration with other aircraft systems; e.g., flight directors, electronic flight instrument system (**EFIS**) displays, etc. The **Loran-C** may be coupled to the radio **nav** function of an autopilot provided it has a **course** deviation indicator output that is **compatible** with the autopilot and the **same** installation procedures normally used for the **VOR** coupling are used.

d. Provides a navigation source annunciator if the Loran-C installation supplies any information to displays such as an HSI or CDI which can also display data from other equipment normally used for aircraft navigation.

e. Except for items c and d of this paragraph, is completely isolated from all IFR systems.

f. Has an approval recordation contained in an FAA Form 337 and that a placard is in clear view of the pilot which indicates "Loran-C Not Approved For IFR."

NOTE: Helicopters approved only for VFR operations do not need placarding.

8/24/88

AC 20-121A

Appendix 2

APPENDIX 2. SAMPLE AIRPLANE FLIGHT MANUAL SUPPLEMENT .

INSTALLATION CENTER/FAA REPAIR STATION # _____
123 Fourth Street Anytown, USA

FAA APPROVED AIRPLANE FLIGHT MANUAL SUPPLEMENT
LORAN-C NAVIGATION SYSTEM

AIRPLANE MAKE:

AIRPLANE MODEL:

AIRPLANE SERIAL NUMBER:

AIRPLANE REGISTRATION NUMBER:

This document must be carried in the airplane at all times. It describes the operating procedures for the _____ Loran-C System when it has been installed in accordance with (manufacturer's installation manual) and FAA Form 337 dated _____.

For airplanes with a Pilot's Operating Handbook and/or FAA approved Airplane Flight Manual, this document serves as the FAA Approved _____ Loran-C Flight Manual Supplement. When the Loran-C system is installed in an airplane that does not have an FAA approved -Airplane Flight Manual, this document serves as the FAA Approved Supplemental Flight Manual.

The information contained herein supplements or supersedes the basic Airplane Flight Manual only in those areas listed herein. For limitations, procedures, and performance information not contained in this document, consult the basic Airplane Flight Manual (if applicable).

FAA APPROVED:

(Inspector's Name)
Aviation Safety Inspector (Avionics)
ACE-GADO/ACDO/FSDO # _____
Federal Aviation Administration

FAA APPROVED

DATE: _____

INSTALLATION CENTER/FAA REPAIR STATION # _____
 123 Fourth Street
 Anytown, USA

FAA APPROVED AIRPLANE FLIGHT MANUAL SUPPLEMENT
 LORAN-C NAVIGATION SYSTEM

SECTION I

INTRODUCTION

A. EQUIPMENT DESCRIPTION

Provide a general description of the Loran-C Area Navigation System installed in the aircraft.

B. GENERAL

Provided the _____ Loran-C navigation system is receiving adequate usable signals it has **been** demonstrated capable of and has been **shown** to **meet** the accuracy specifications of:

1. **VFR/IFR** en route, terminal and approach (if applicable) operation within the **conterminous** United States and Alaska in accordance with the criteria of AC 20-121A.
2. Flight in the North Atlantic (**NAT**) **Minimum** Navigation Performance Specifications (**MNPS**) airspace in accordance with AC 91-49, General Procedures for Flight in North Atlantic **Minimum Navigation Performance Specifications** Airspace (if applicable).

FAA APPROVED

DATE: _____

Page 2

INSTALLATION CENTER/FAA REPAIR STATION # _____
123 Fourth Street
Anytown, USA

FAA APPROVED AIRPLANE FLIGHT MANUAL SUPPLEMENT
LORAN-C NAVIGATION SYSTEM

SECTION III

EMERGENCY PROCEDURES

Am If sensor information is intermittent or lost, utilize remaining operational navigation ~~equipment~~ as required.

INSTALLATION CENTER/FAA REPAIR STATION # _____
123 Fourth Street
Anytown, USA

FAA APPROVED AIRPLANE FLIGHT MANUAL SUPPLEMENT
LORAN-C NAVIGATION SYSTEM

SECTION IV

NORMAL PROCEDURES

A. OPERATION

Normal operating procedures are outlined in the Pilot's Guide, P/N _____, dated _____, (or later revision).

B. SYSTEM ANNUNCIATORS

Describe each remote annunciator, such as:

1. Waypoint (WPT)
2. Message (MSG)
3. Dead Reckoning (DR)
4. Cross-track (X-Track) (Parallel-offset)
5. Equipment Status (signal strength, signal status, signal-to-noise ratio, system failure, etc.)

C. SYSTEM SWITCHES

Describe the function and operation of the various switches used with the system

D. PILOT'S DISPLAY

Describe the pilot's display (i.e., CDI, HSI, RMI, OBS).

FAA APPROVED
DATE: _____

INSTALLATION CENTER/FAA REPAIR STATION # _____
123 Fourth Street
Any-to-m, USA

FAA APPROVED AIRPLANE FLIGHT MANUAL SUPPLEMENT
LORAN-C NAVIGATION SYSTEM

Em COPILOT'S DISPLAY

Describe the copilot's display (i.e., CDI, WI, RMI, OBS).

F. AUTOPILOT OPERATION

Describe the coupling of Loran-C steering information to the autopilot.

G. FLIGHT DIRECTOR

Describe the coupling of Loran-C steering information to the flight director.

8/24/88

AC 20-121A
Appendix 2

INSTALLATION CENTER/FAA REPAIR STATION # _____
123 Fourth Street
Anytown, USA

FAA APPROVED AIRPLANE FLIGHT MANUAL SUPPLEMENT
LORAN-C NAVIGATION SYSTEM

SECTION V

ABNORMAL PROCEDURES

No change.

SECTION VI

PERFORMANCE

No Change

FAA APPROVED
DATE: _____

Page 7

8/24/88

AC 20-121A
Appendix 3

APPENDIX 3. SAMPLE DATA SHEET TO ATTACH TO FAA FORM 337.

ATTACH TO FAA FORM 337

AIRPLANE MAKE:

AIRPLANE MODEL:

AIRPLANE SERIAL NUMBER:

AIRPLANE REGISTRATION NUMBER:

DATE WORK COMPLETED:

_____ Loran-C Navigation System, consisting of the following components, was installed per _____ Installation Manual Number _____, Revision _____, dated _____. The installation conforms to AC 43.13-1A and AC 43.13-2A.

<u>Equipment</u>	<u>Part Number</u>	<u>Serial Number</u>	<u>Software Version</u>
_____ Nav Computer	xxx-xx-xxxx	yyyy-zz	ww
_____ Antenna	xxx-xx-xxxx	yyyy-zz	-
_____ Control/Display etc.	xxx-xx-xxxx	yyyy-zz	ww

Proper ground operation of the _____ system was confirmed through completion of the system checkout, Section ____, of the Installation Manual. The system was found to meet or exceed all specifications of this section.

A flight check was made to insure that the accuracy requirements of AC 20-121A were met during flight. () YES () NOT APPLICABLE

PLACE LORAN-C ACCURACY DATA IN AIRCRAFT PERMANENT RECORDS (If applicable)

WAYPOINT:

Latitude/longitude: _____
or
Station Identifier/Frequency: _____

Radial: _____

Distance: _____

Altitude: _____

Perpendicular distance to tangent point: _____

Distance along track from tangent point: _____

MEASURED SYSTEM ERROR:

Along-Track Error

Crosstrack Error:

ALLOWABLE SYSTEM ERROR FROM AC 20-121A, PARAGRAPH 9:

Along-Track Error

Crosstrack Error

8/24/88

AC 20-121A
Appendix 4

LORAN-C CHAIN COVERAGE DIAGRAM


Figure 1


LORAN-C

CANADIAN WEST COAST CHAIN

GRI 5990

This diagram reflects
observed data.

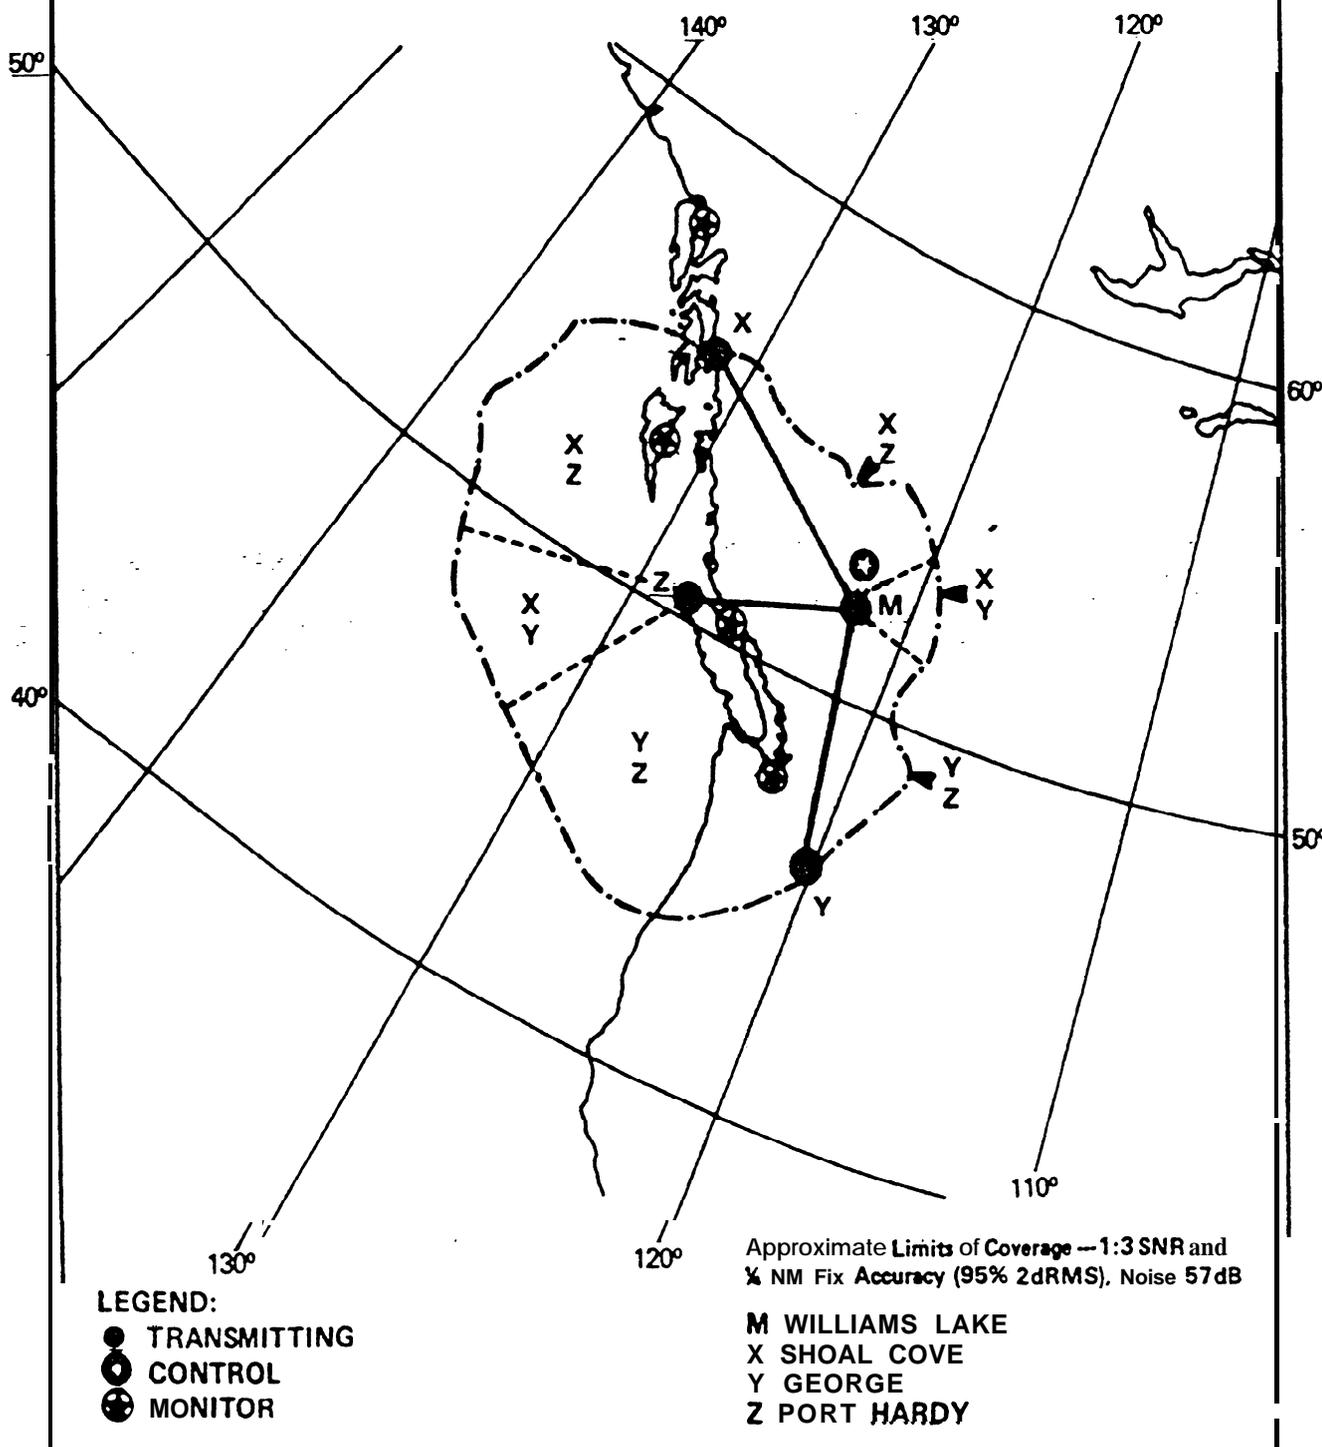


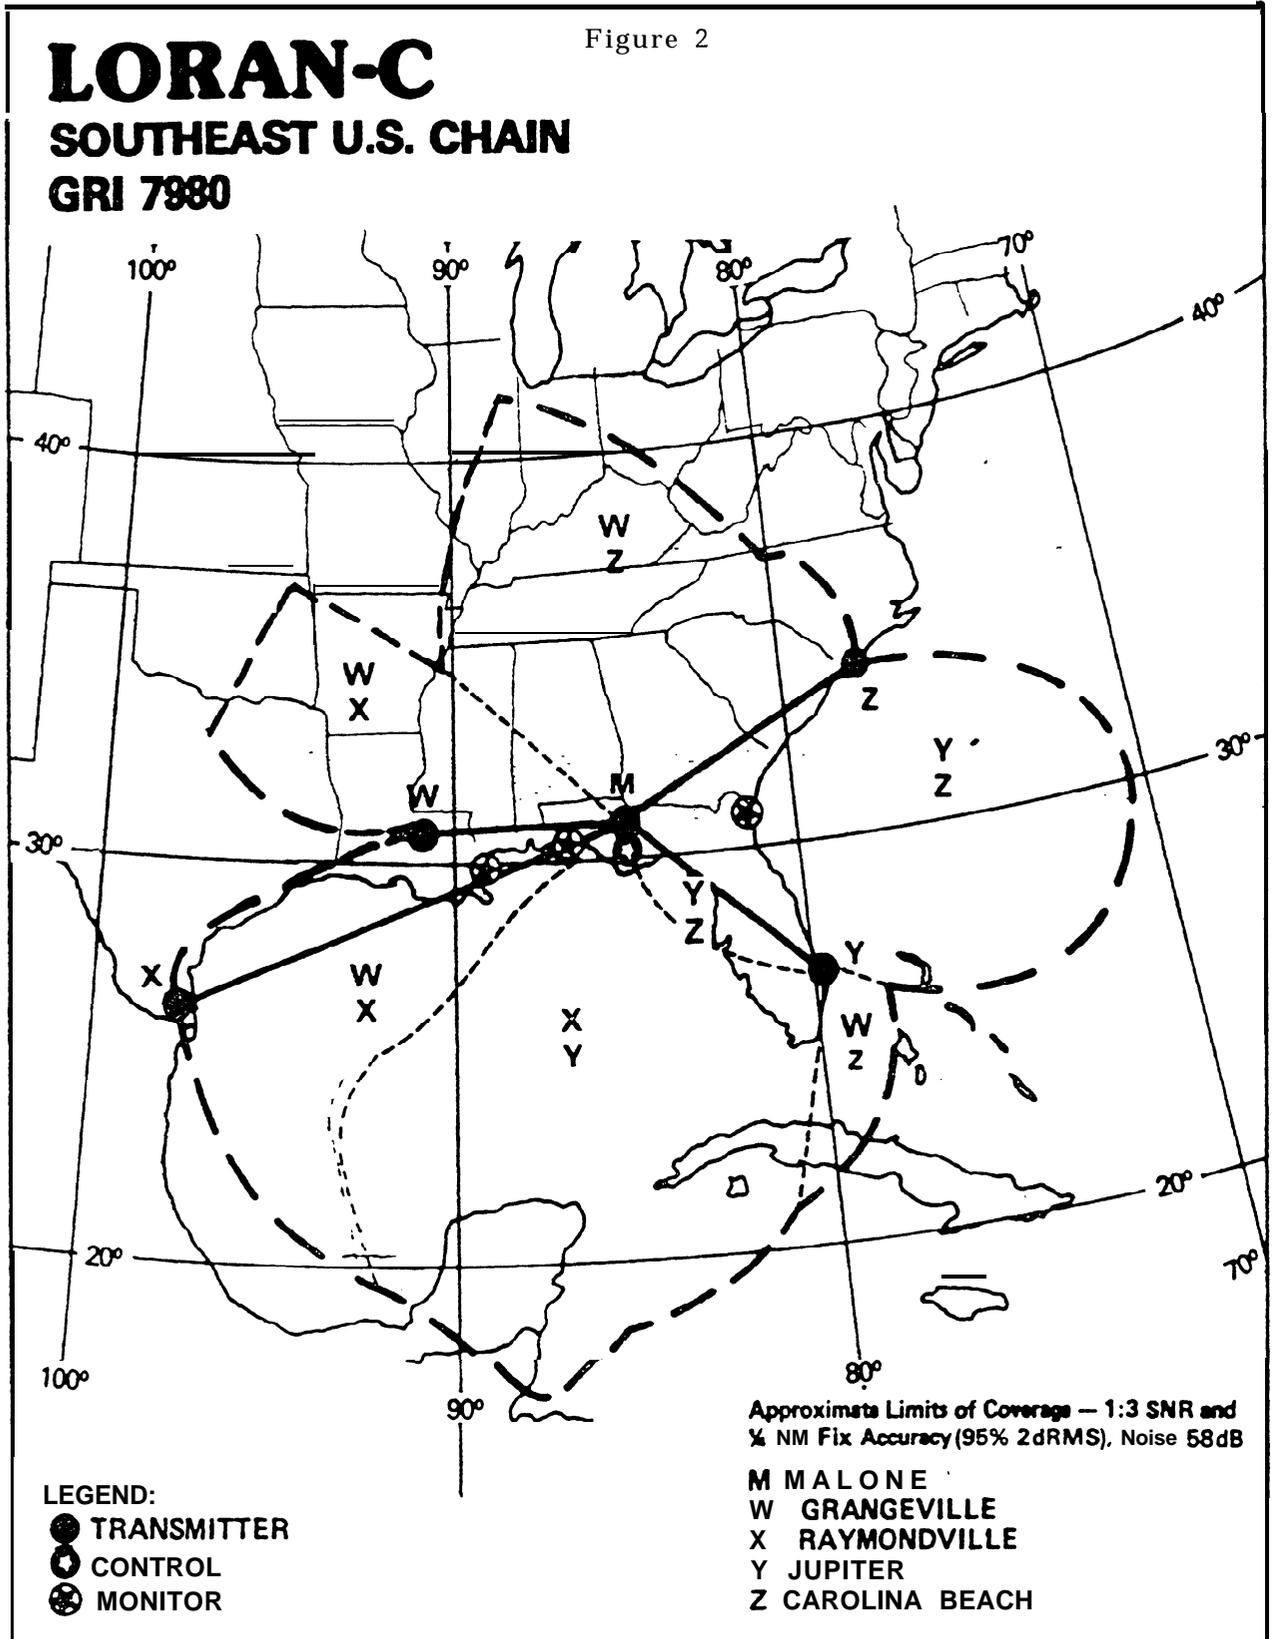

LORAN-C

Figure 3

GREAT LAKES CHAIN GRI 8970

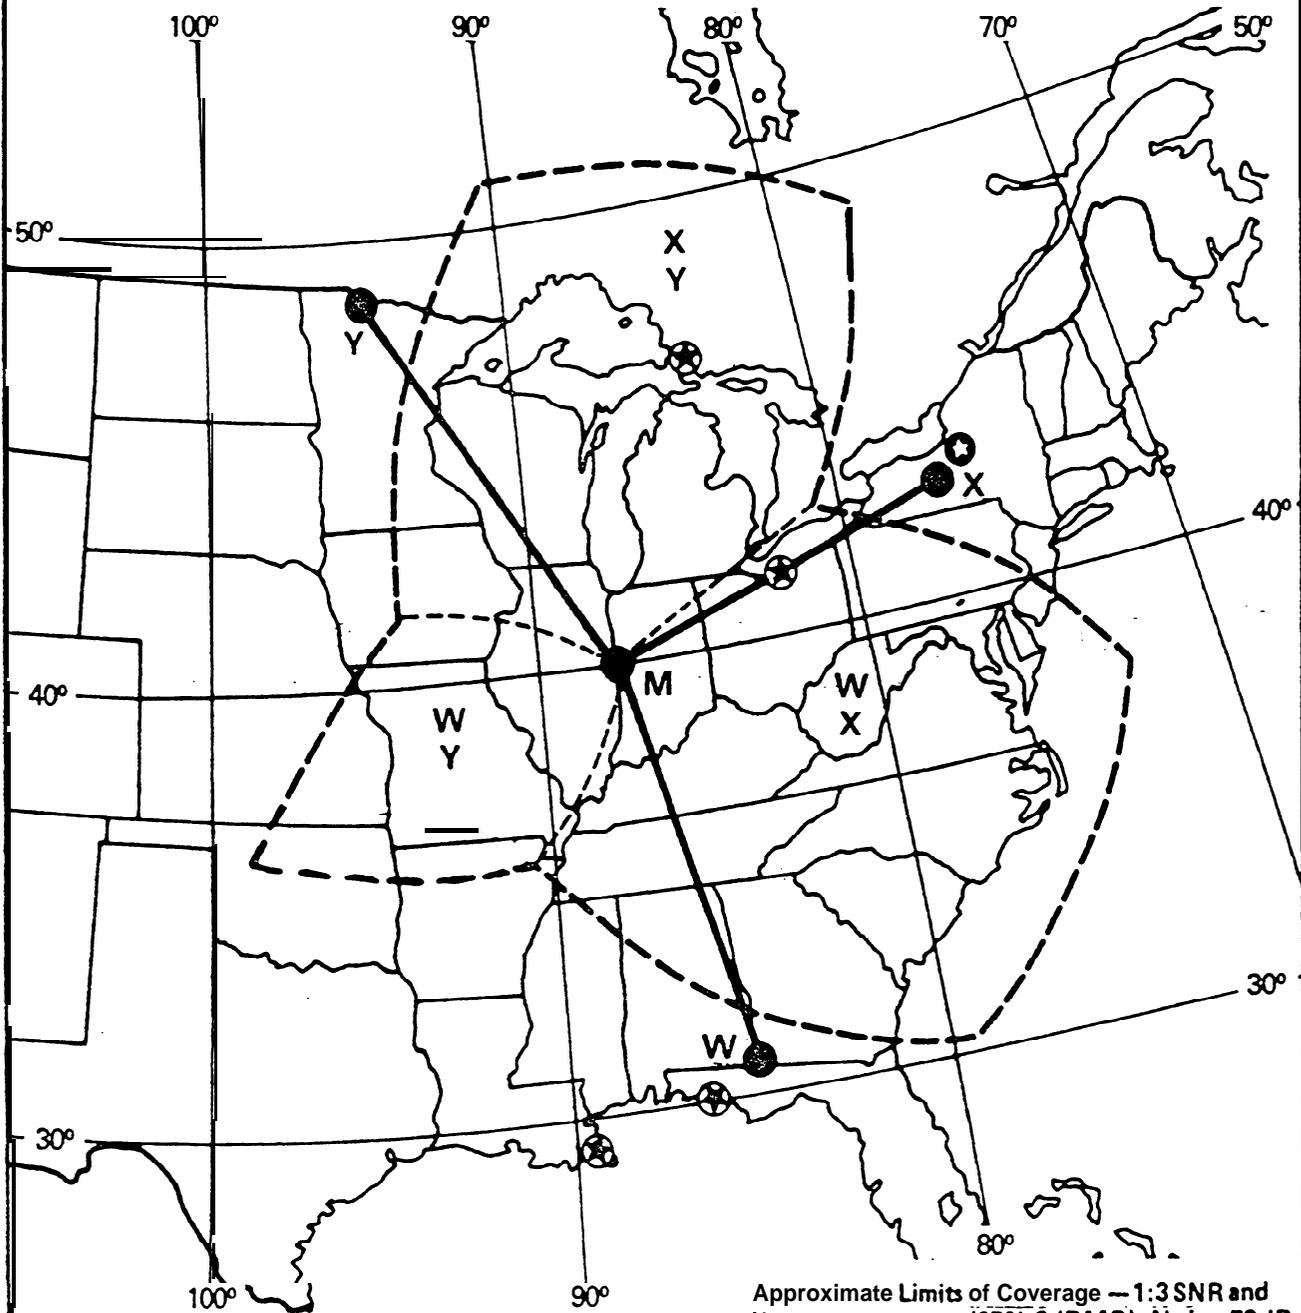

Approximate Limits of Coverage — 1:3 SNR and
¼ NM Fix Accuracy (95% 2dRMS), Noise 53dB

LEGEND:

- TRANSMITTER
- ⊕ CONTROL
- ⊗ MONITOR


- M** DANA
- W** MALONE
- X** SENECA
- Y** BAUDETTE

Figure 4

LORAN-C

U.S. WEST COAST CHAIN

GRI 9940

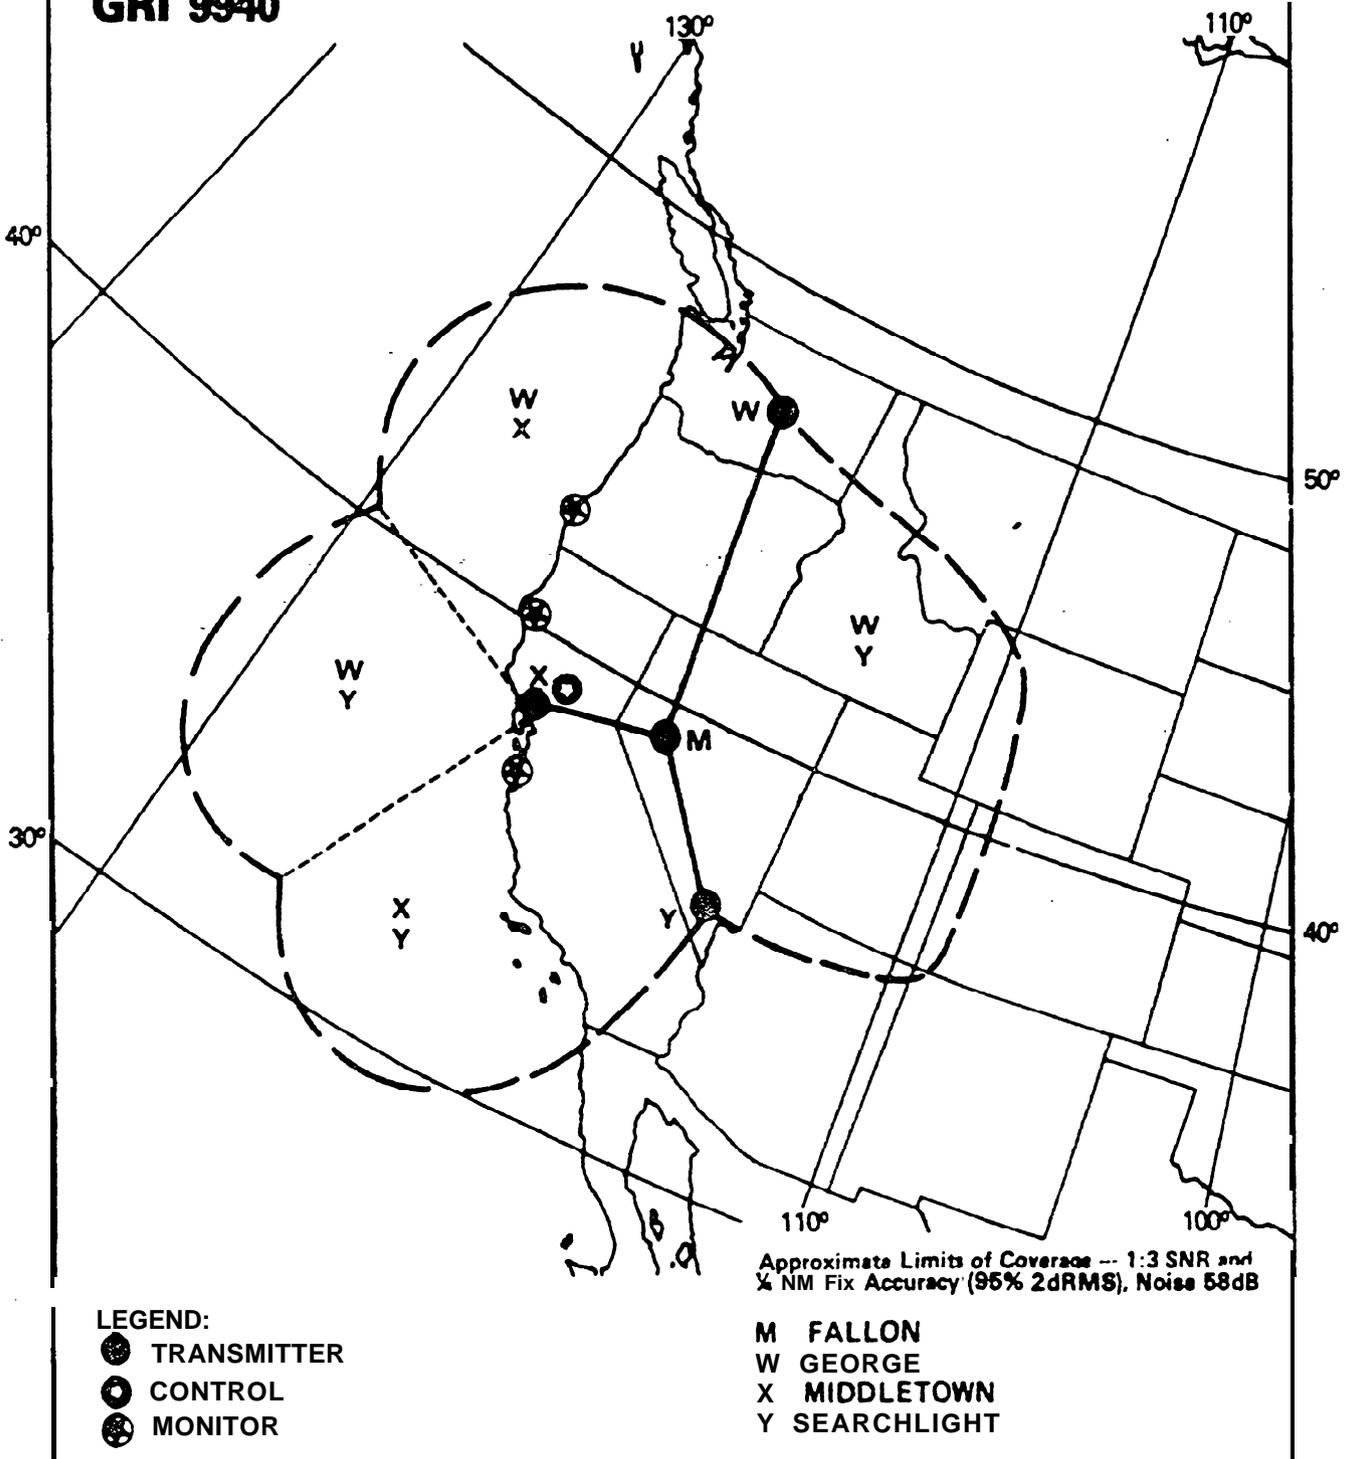


LORAN-C

NORTHEAST U.S. CHAIN

GRI 9960

Figure 5

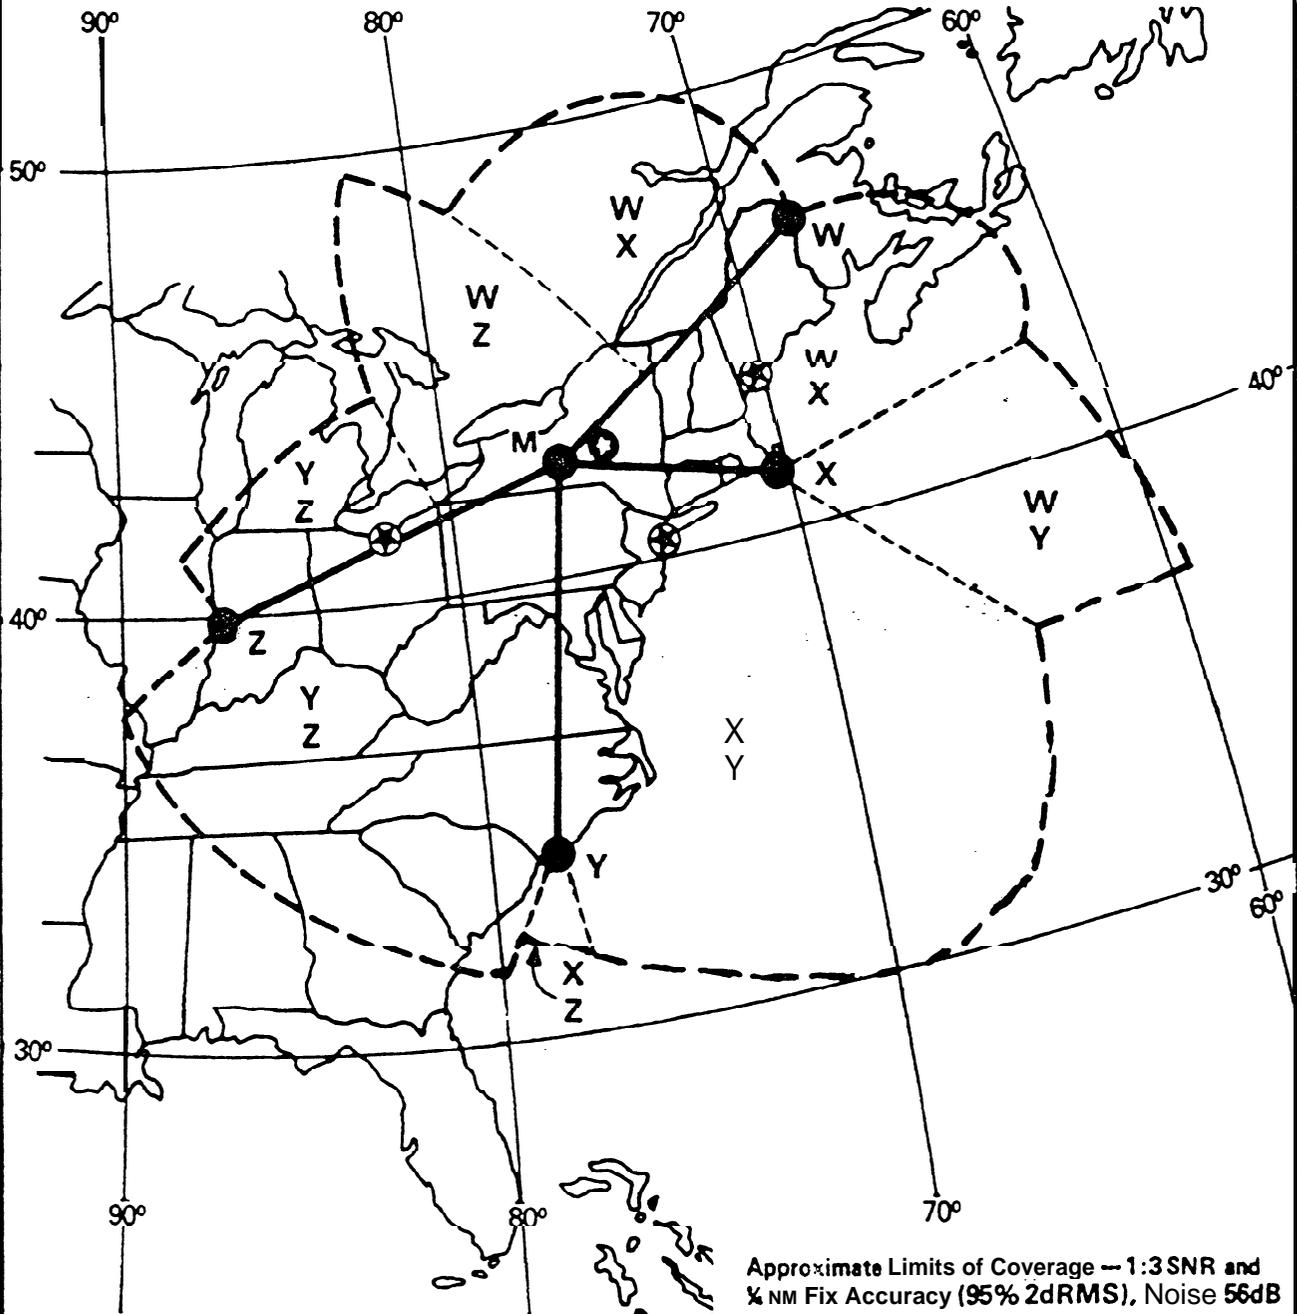

Approximate Limits of Coverage -- 1:3 SNR and
 1/4 NM Fix Accuracy (95% 2dRMS), Noise 56dB

LEGEND:

- TRANSMITTING
- ⊕ CONTROL
- ★ MONITOR

- M SENECA
- W CARIBOU
- X NANTUCKET
- Y CAROLINA BEACH
- Z DANA


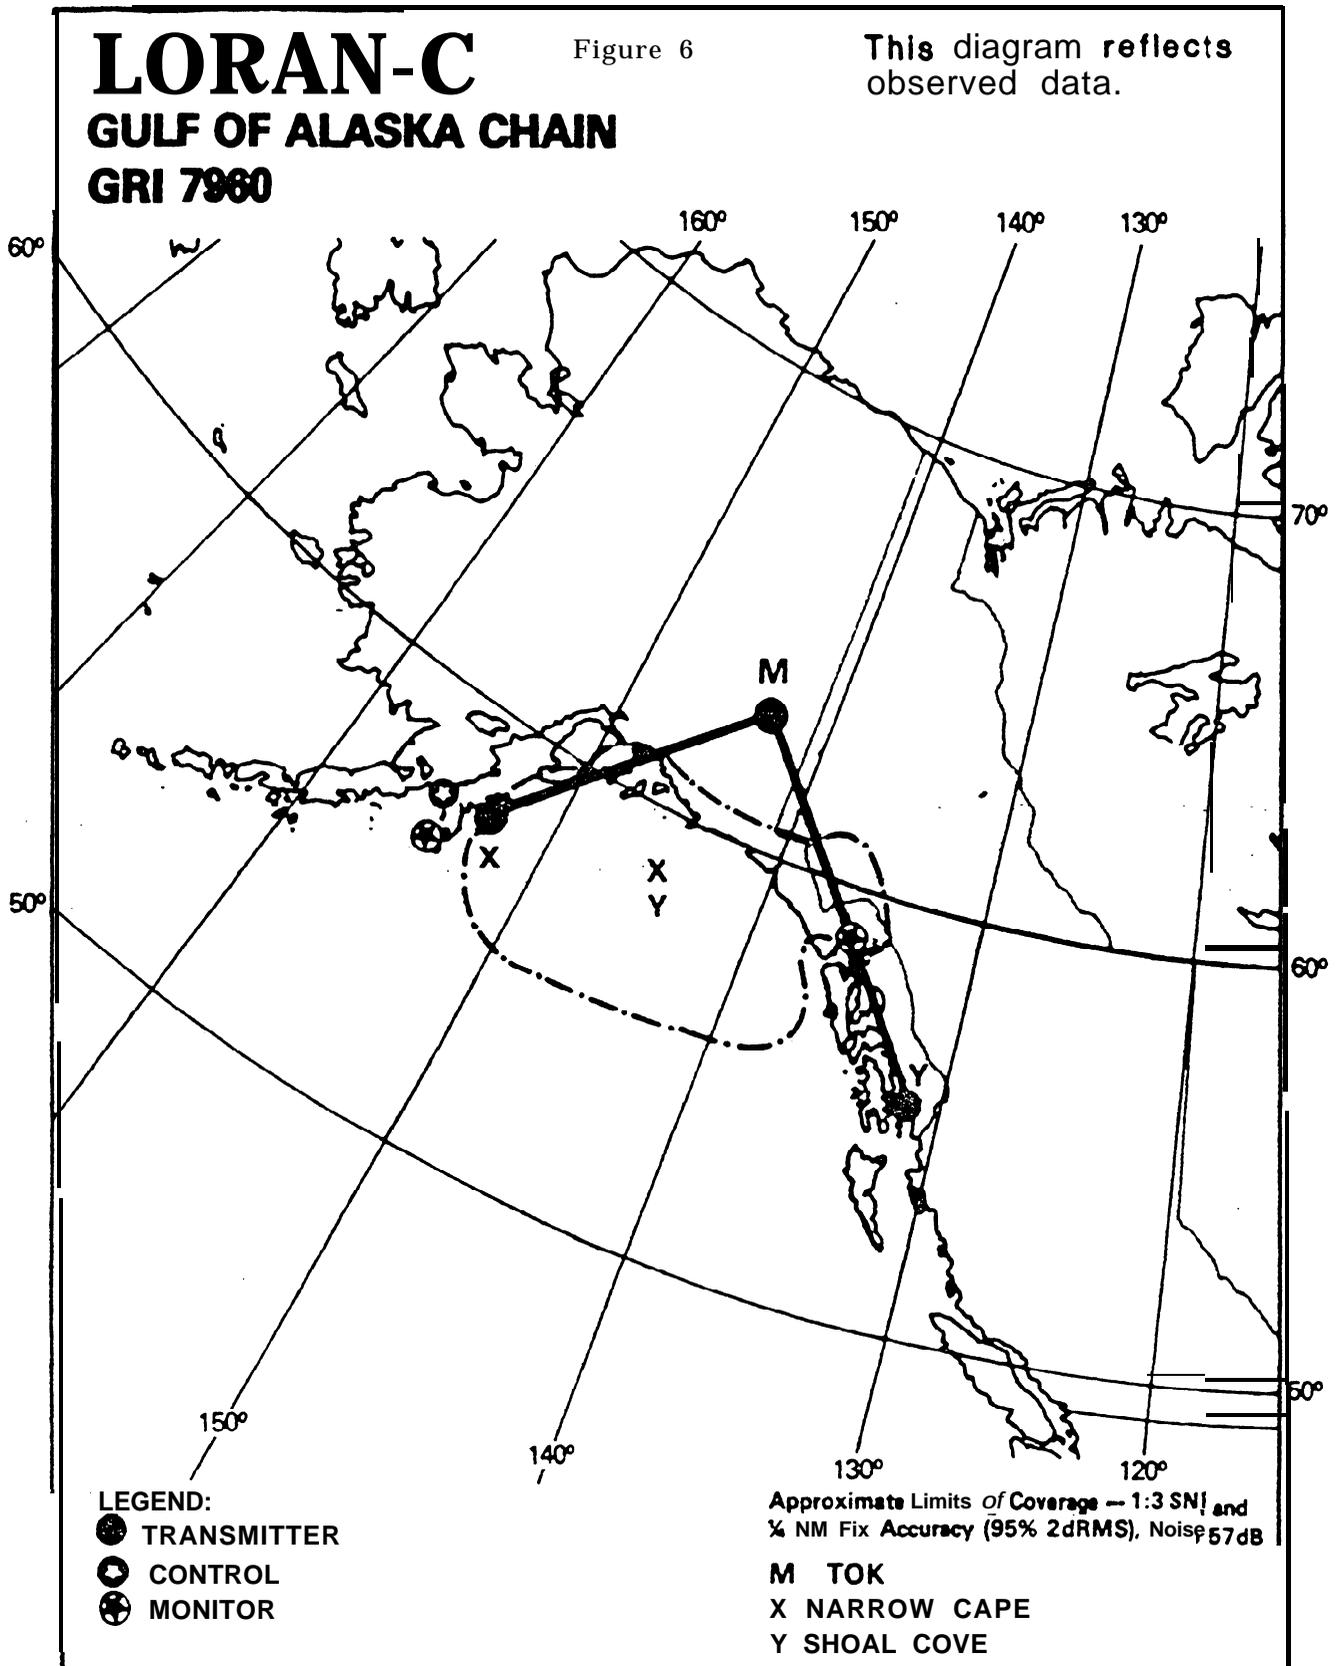


Figure 7

LORAN-C NORTH PACIFIC CHAIN GRI 9880

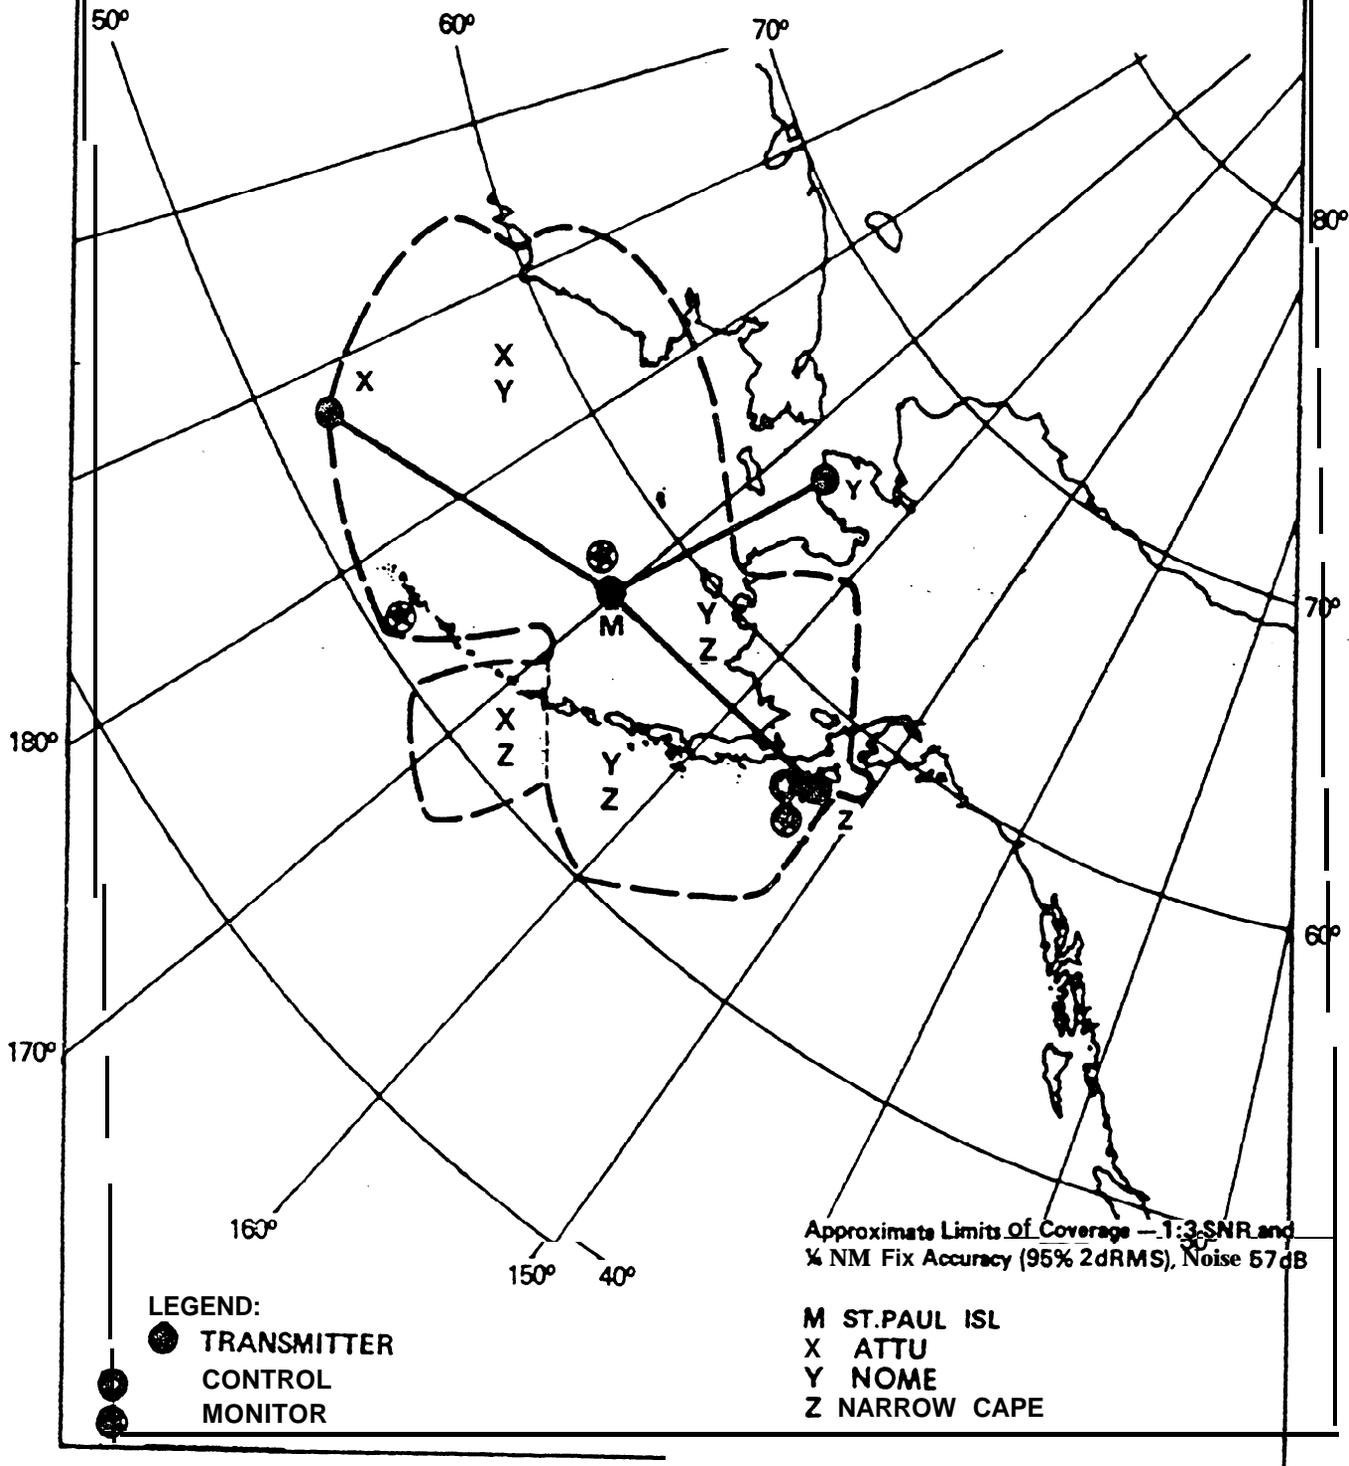


LORAN-C

CENTRAL PACIFIC CHAIN

GRI 4990

Figure 8

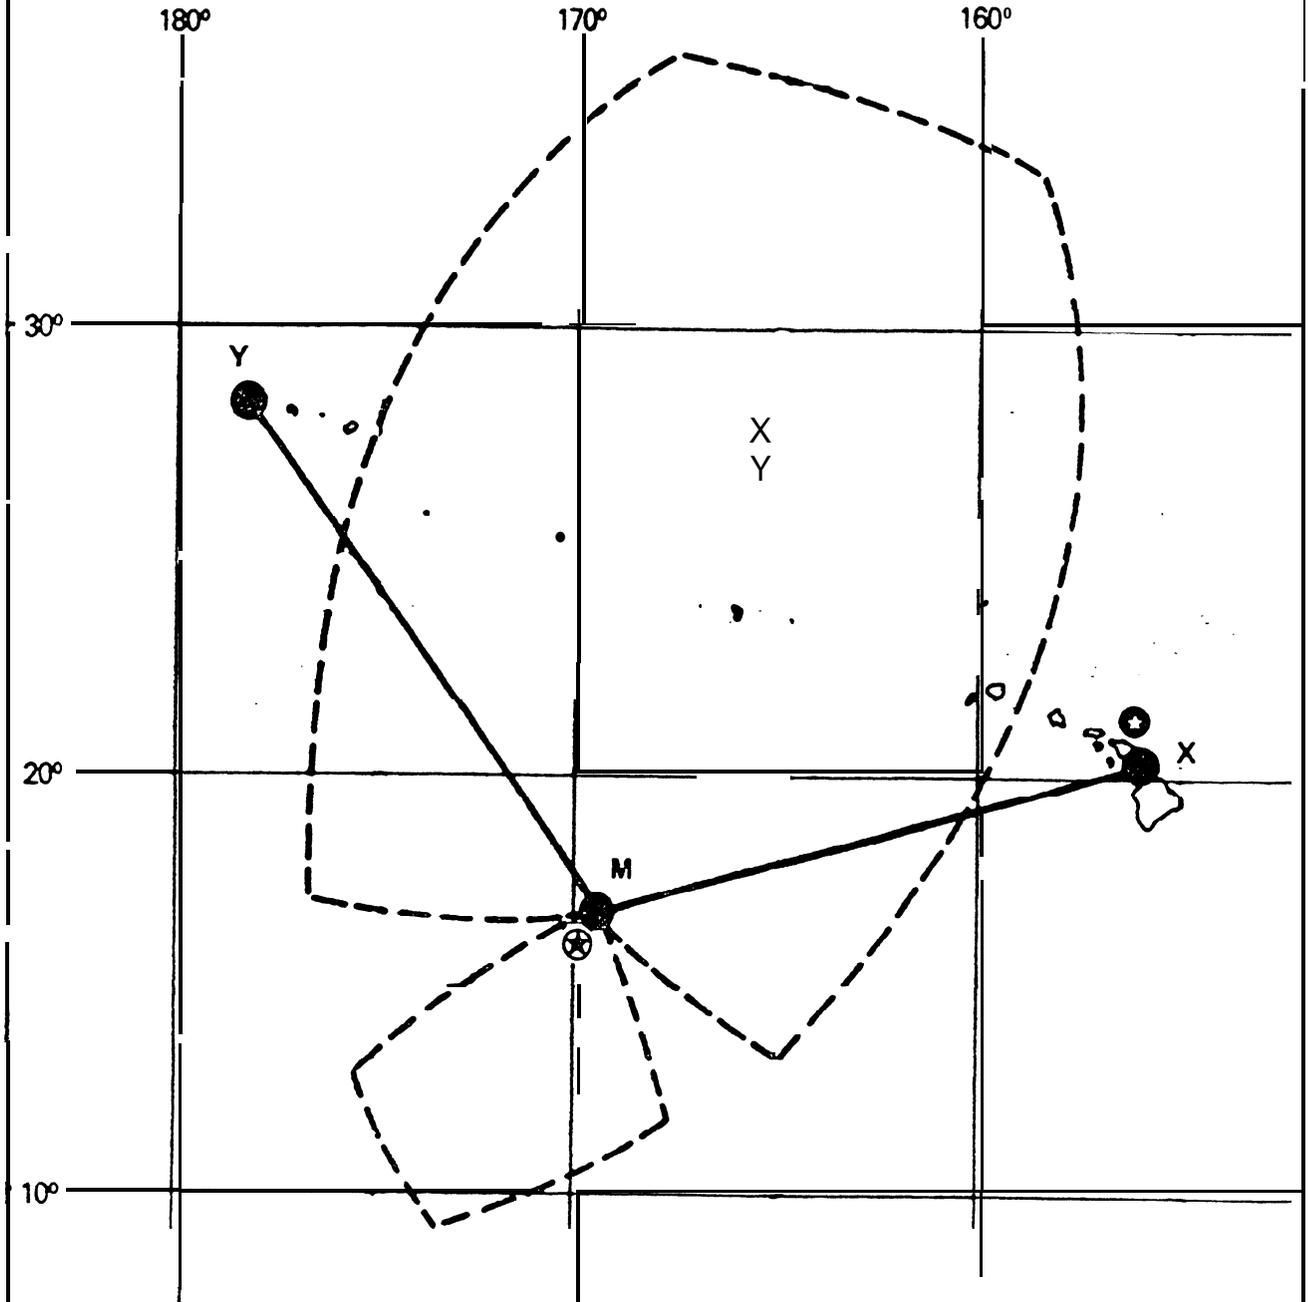

LEGEND:

- TRANSMITTING
- CONTROL
- ⊗ MONITOR

Approximate Limits of Coverage -- 1:3 SNR and
1/2 NM Fix Accuracy (95% 2dRMS), Noise 45dB


- M JOHNSTON IS.
- X UPOLU PT.
- Y KURE IS.

LORAN-C

NORTHWEST PACIFIC CHAIN

GRI 9970

Figure 9

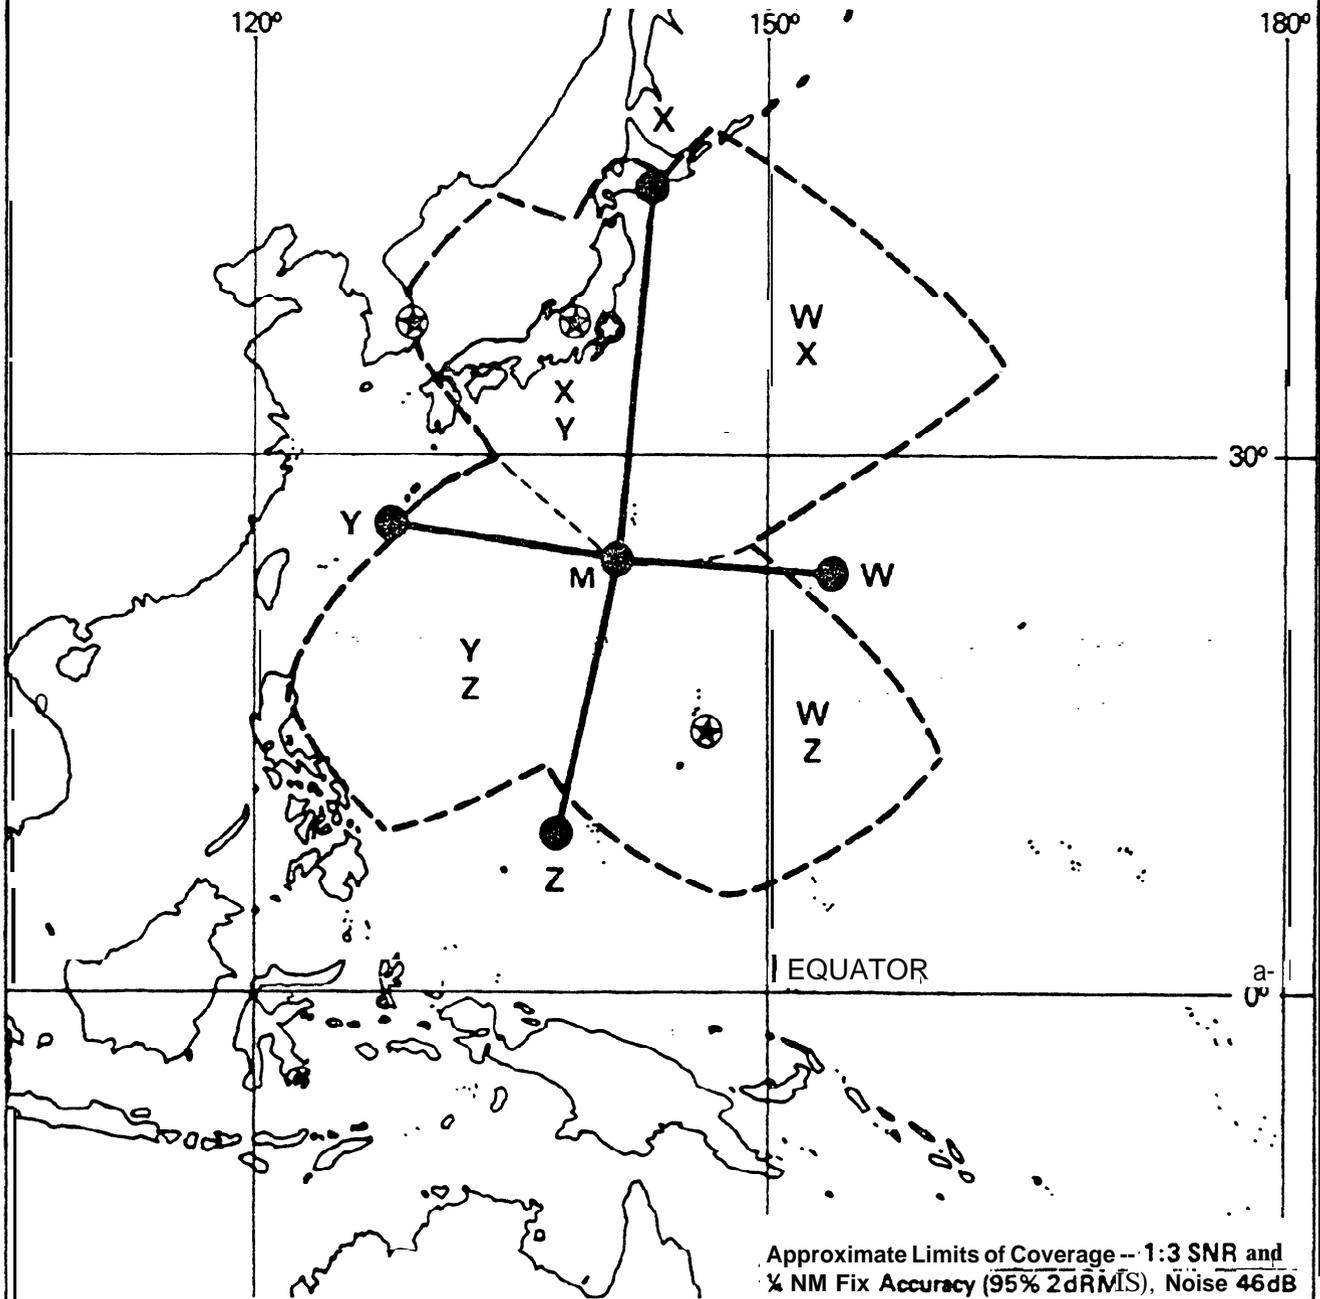


Approximate Limits of Coverage -- 1:3 SNR and
% NM Fix Accuracy (95% 2dRMS), Noise 46dB

LEGEND:

- TRANSMITTING
- ⊗ CONTROL
- ⊙ MONITOR

- M IWO JIMA
- W MARCUS IS.
- X HOKKAIDO
- Y GESASHI
- Z YAP IS.

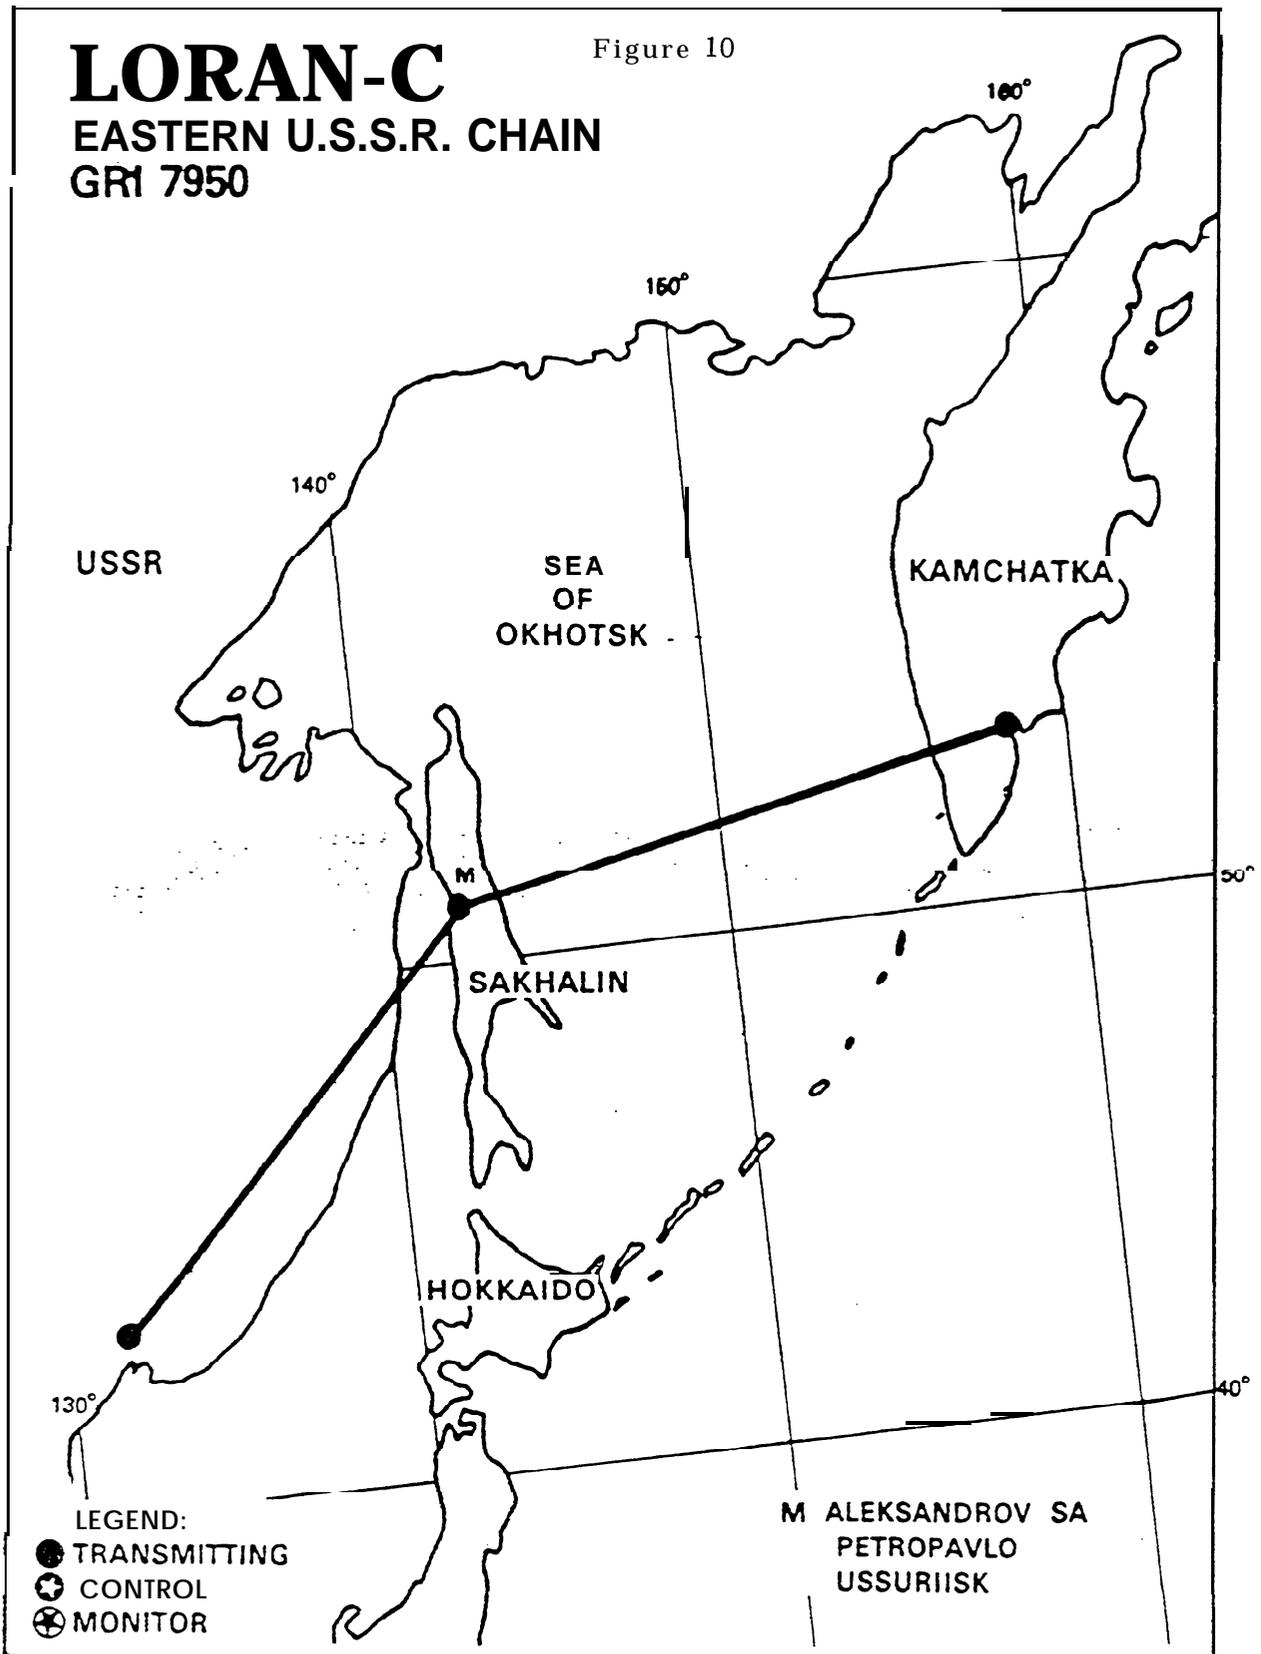


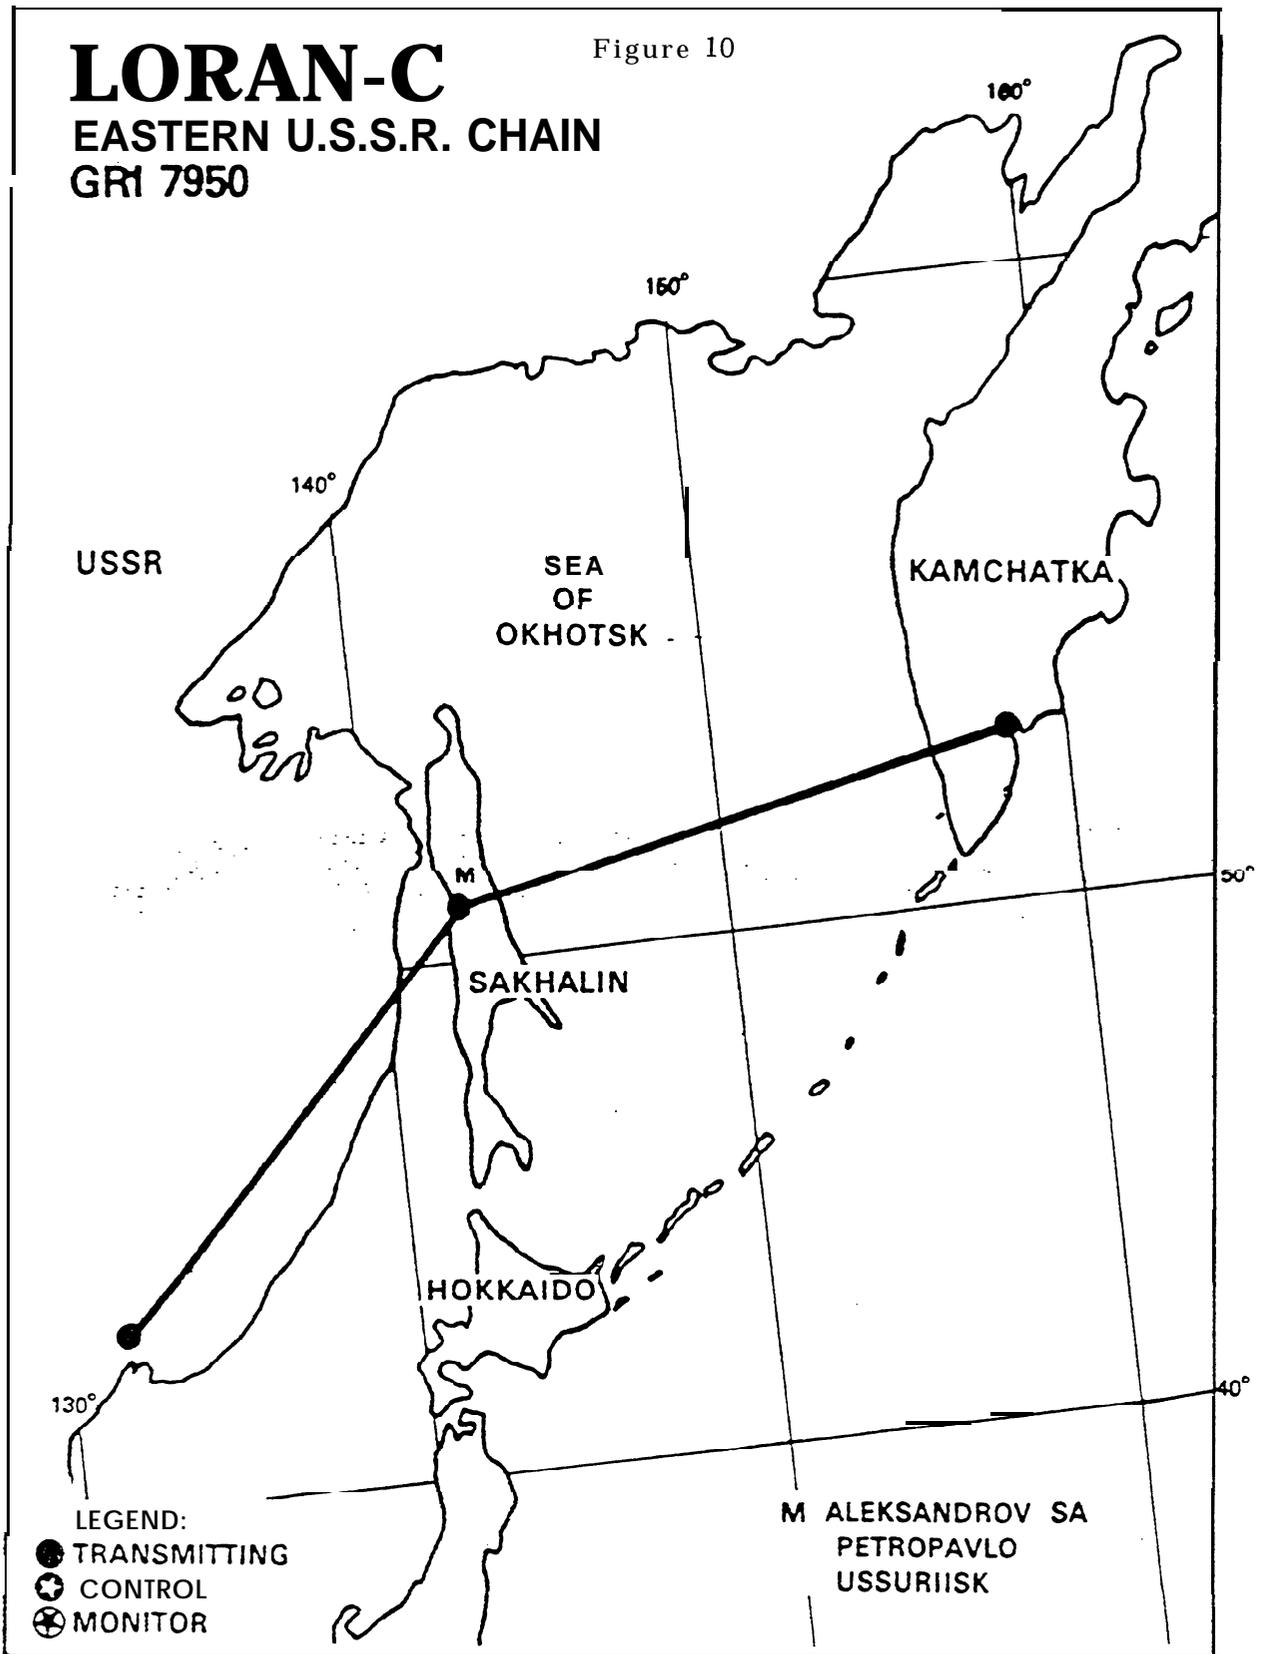



Figure 12


LORAN-C

COMMANDO LION CHAIN

GRI 5970

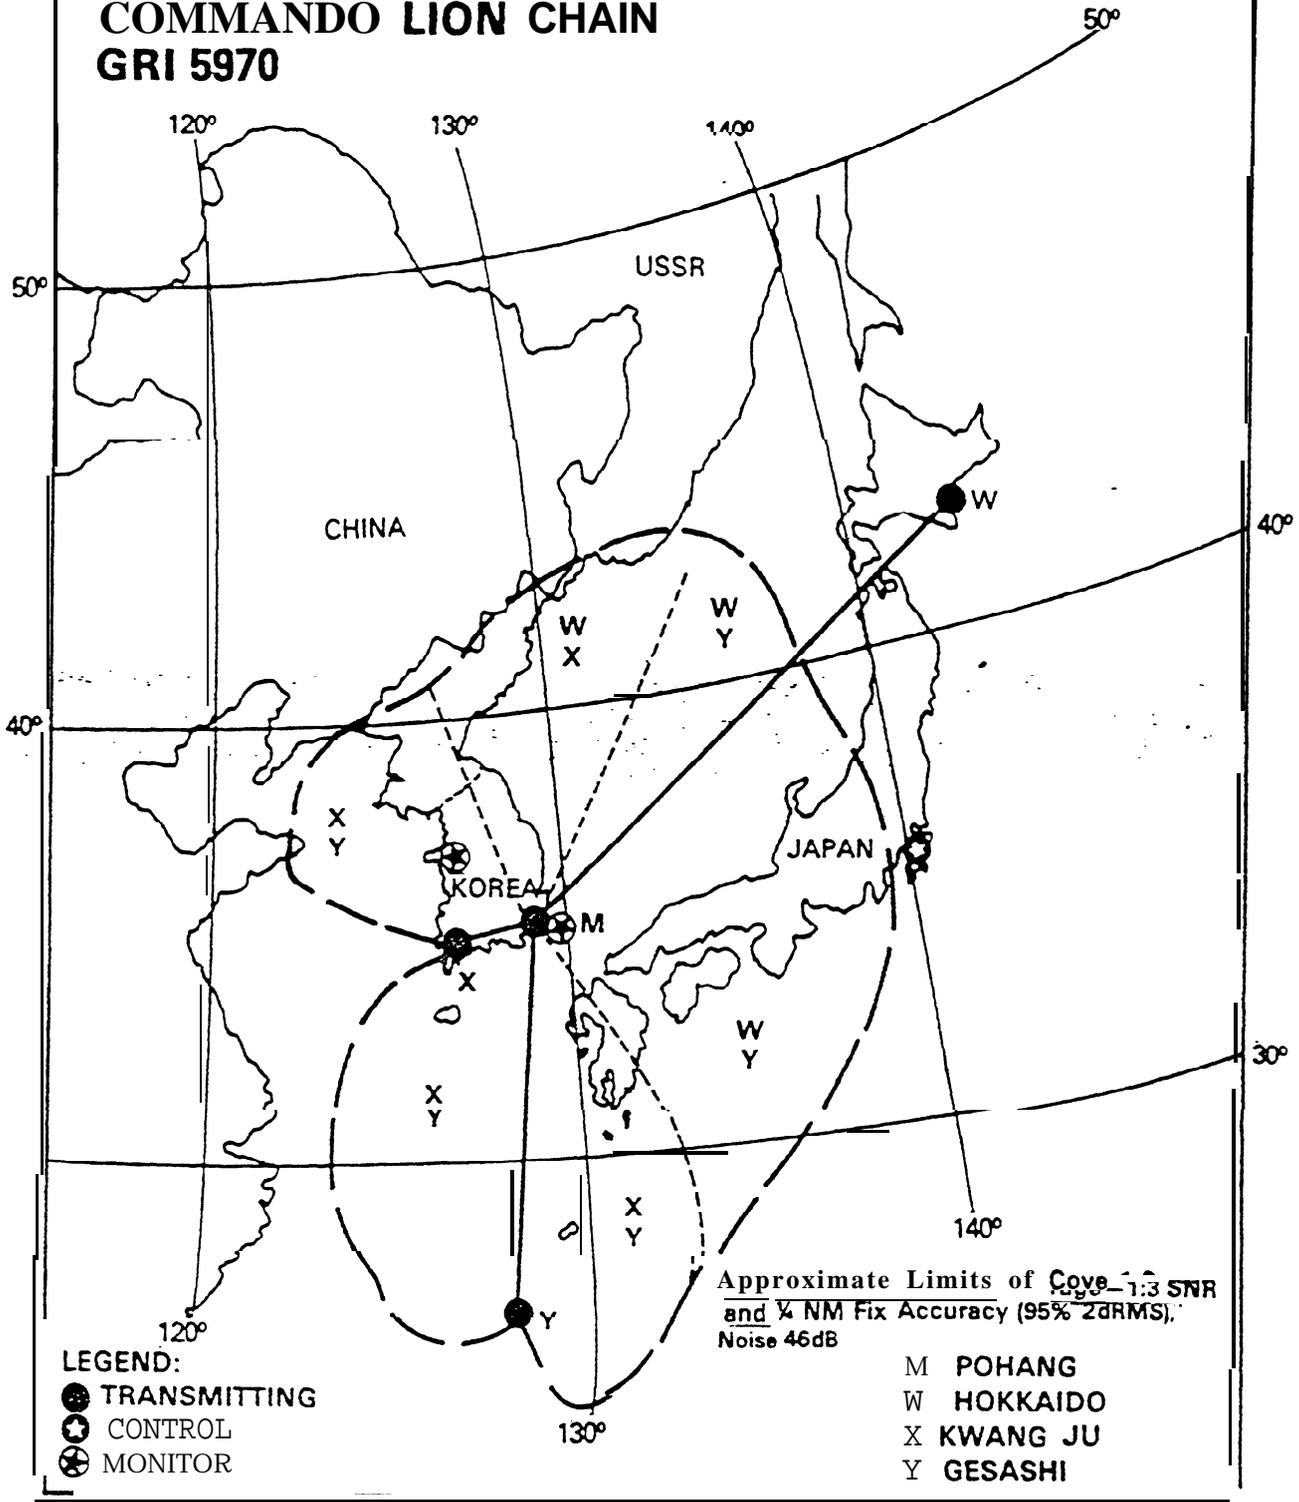

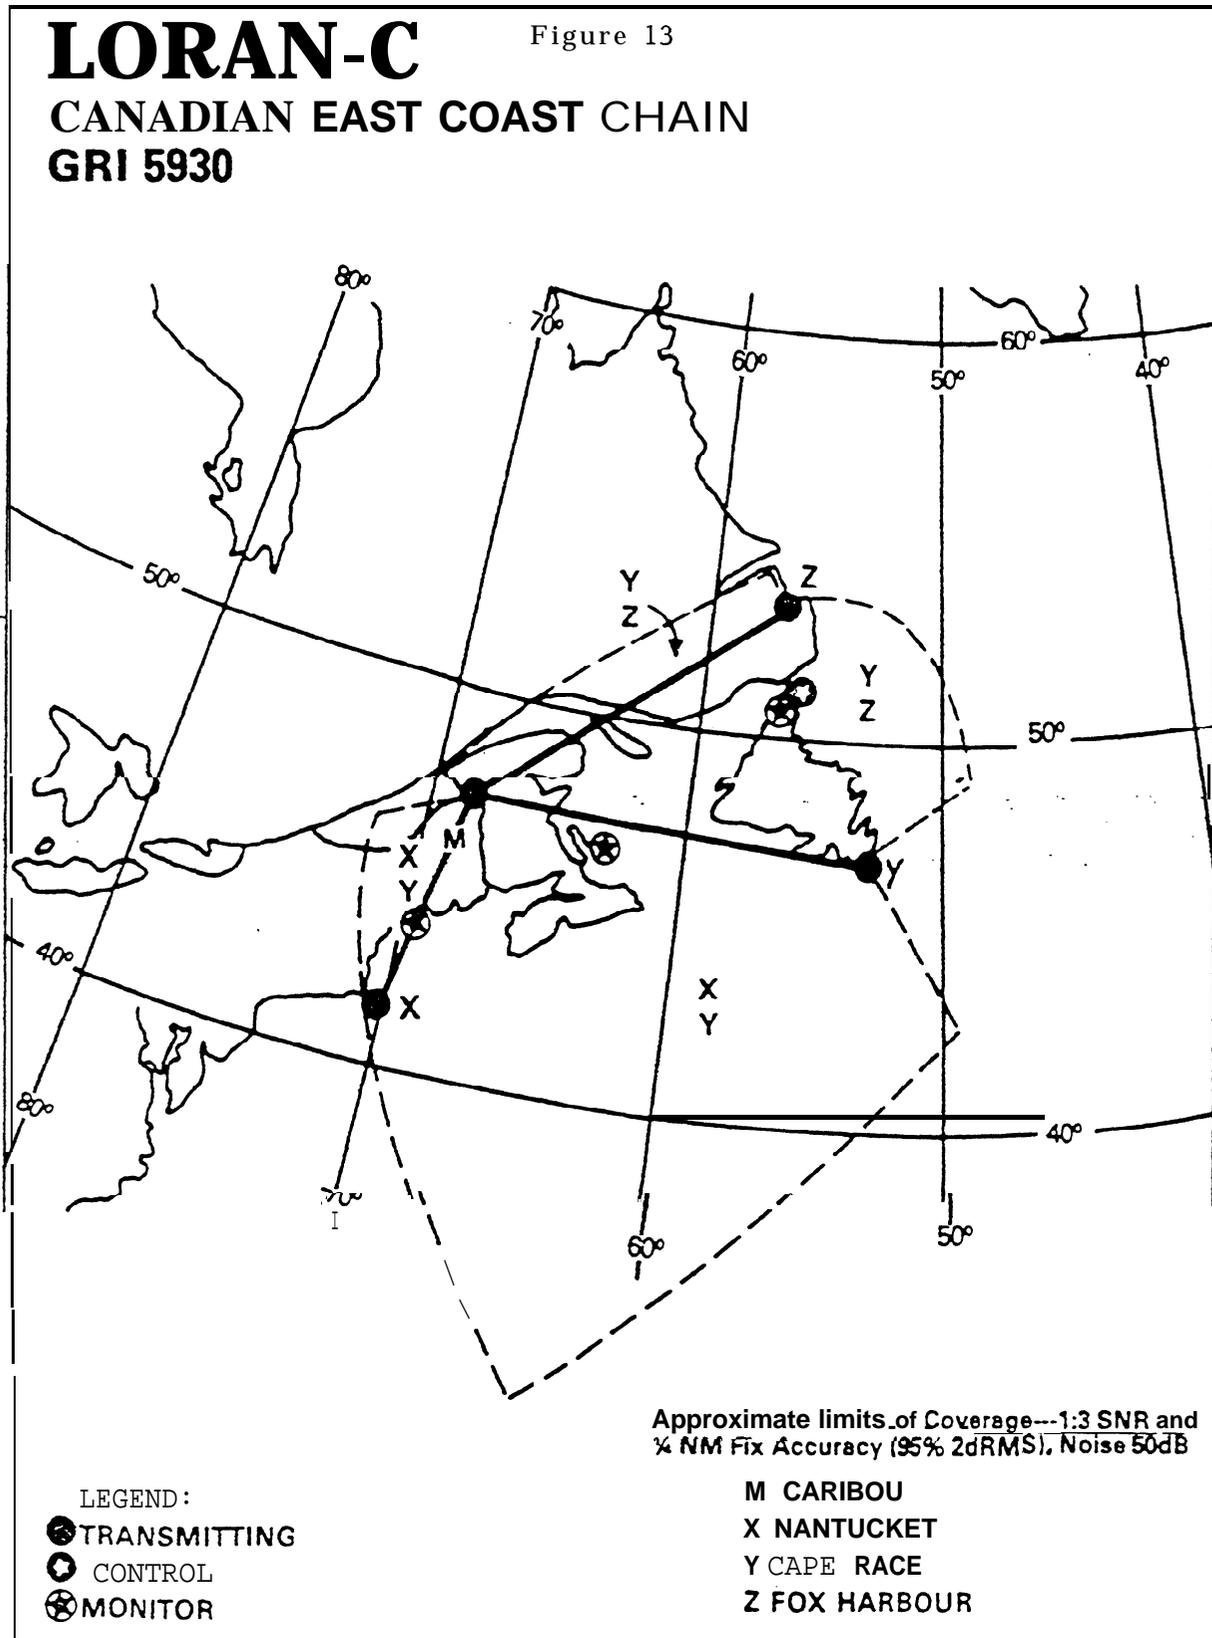

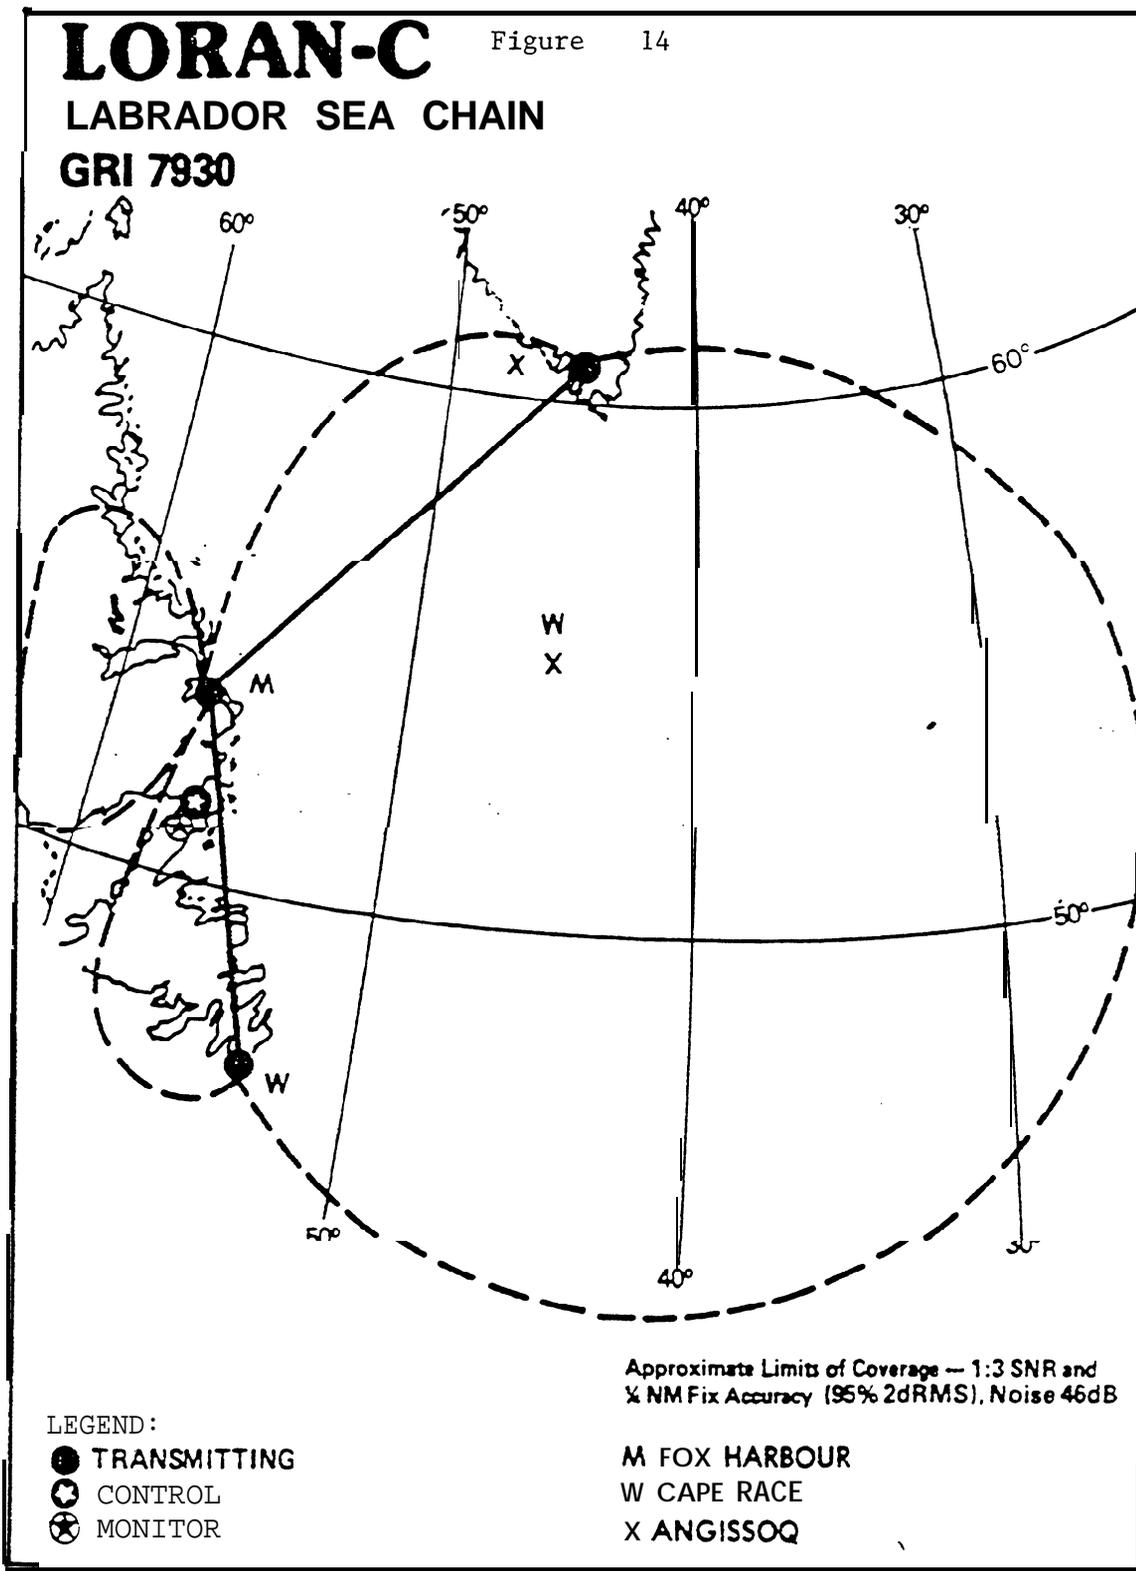


LORAN-C

ICELANDIC CHAIN

GRI 9980

Figure 15

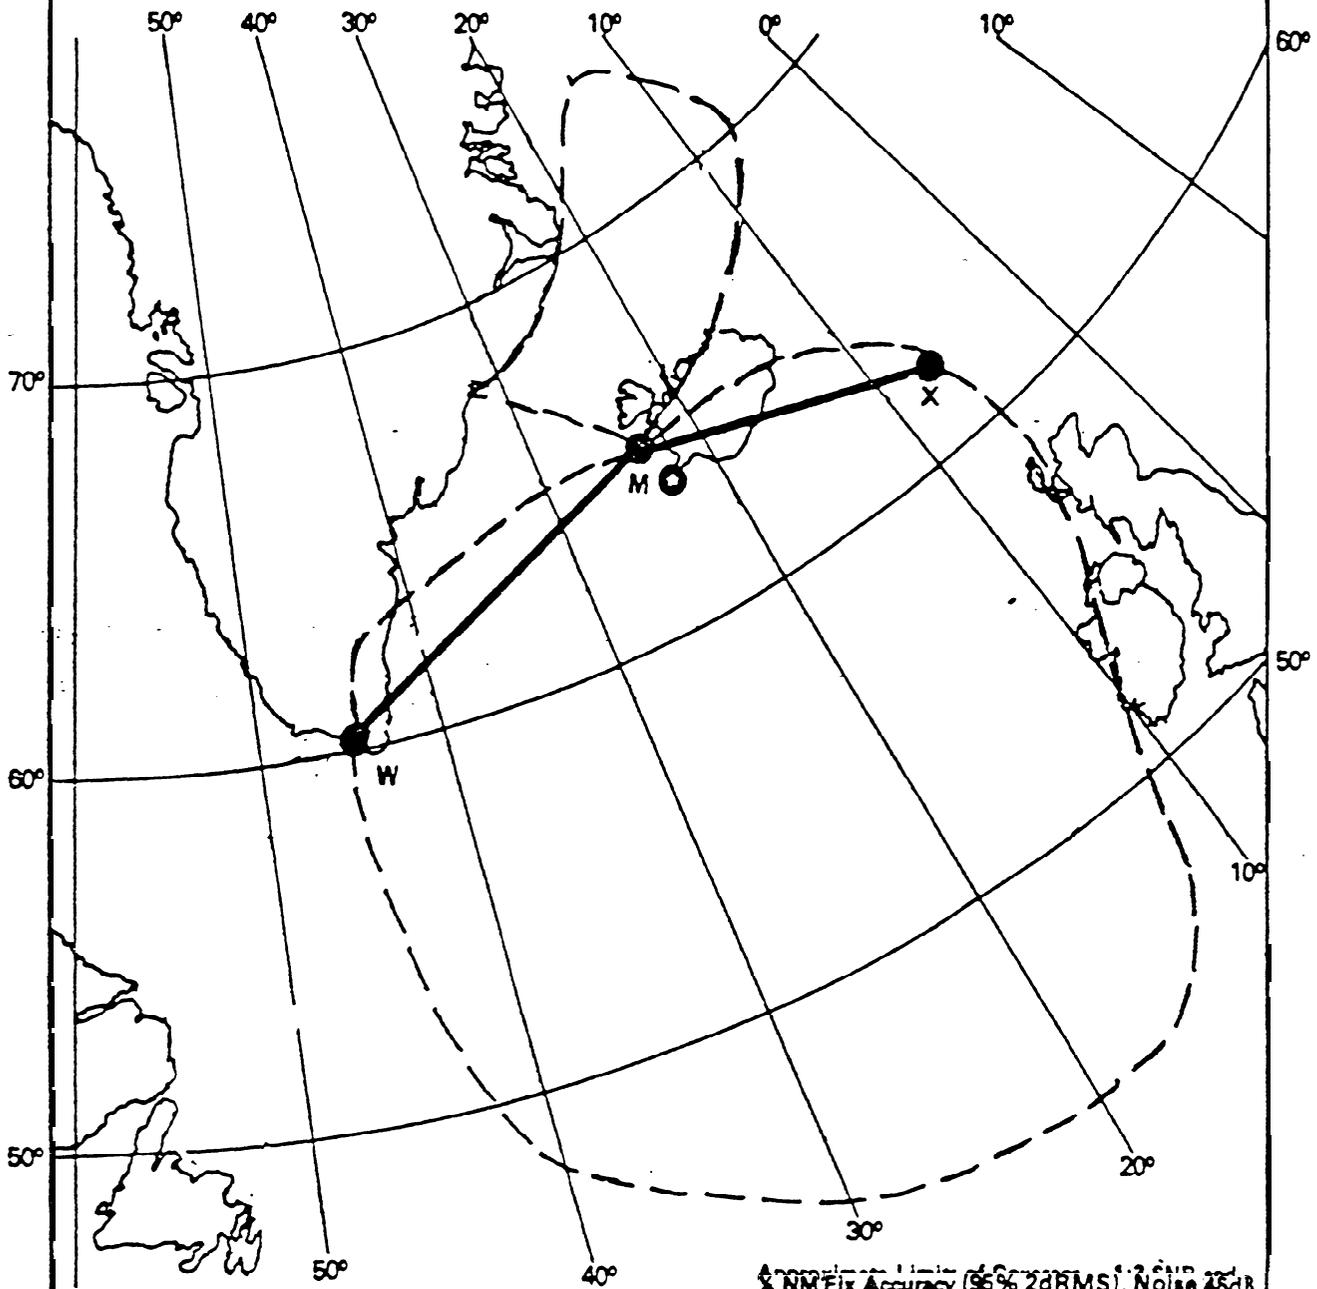



LEGEND:

- TRANSMITTING
- ⊙ CONTROL
- ⊕ MONITOR

- M SANDUR
- W ANGISSOQ
- X EJDE

Approximate Limit of 95% 2σ RMS Fix Accuracy (Noise 45dB)

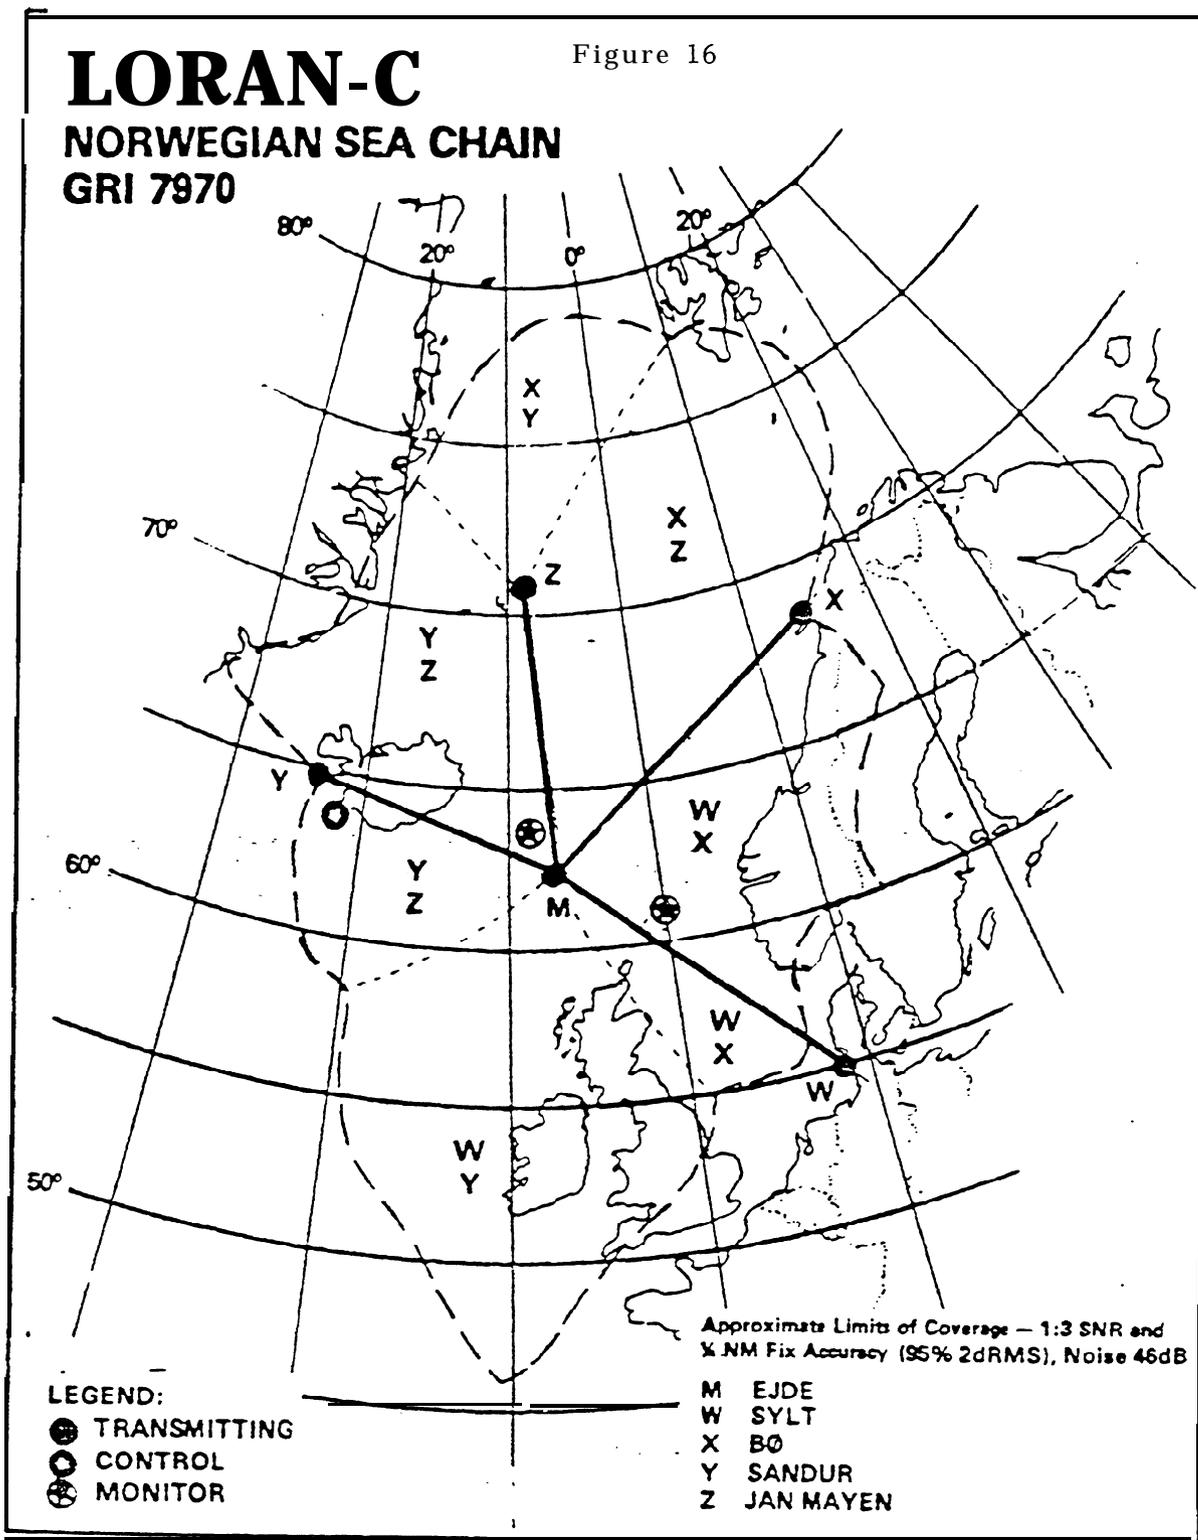

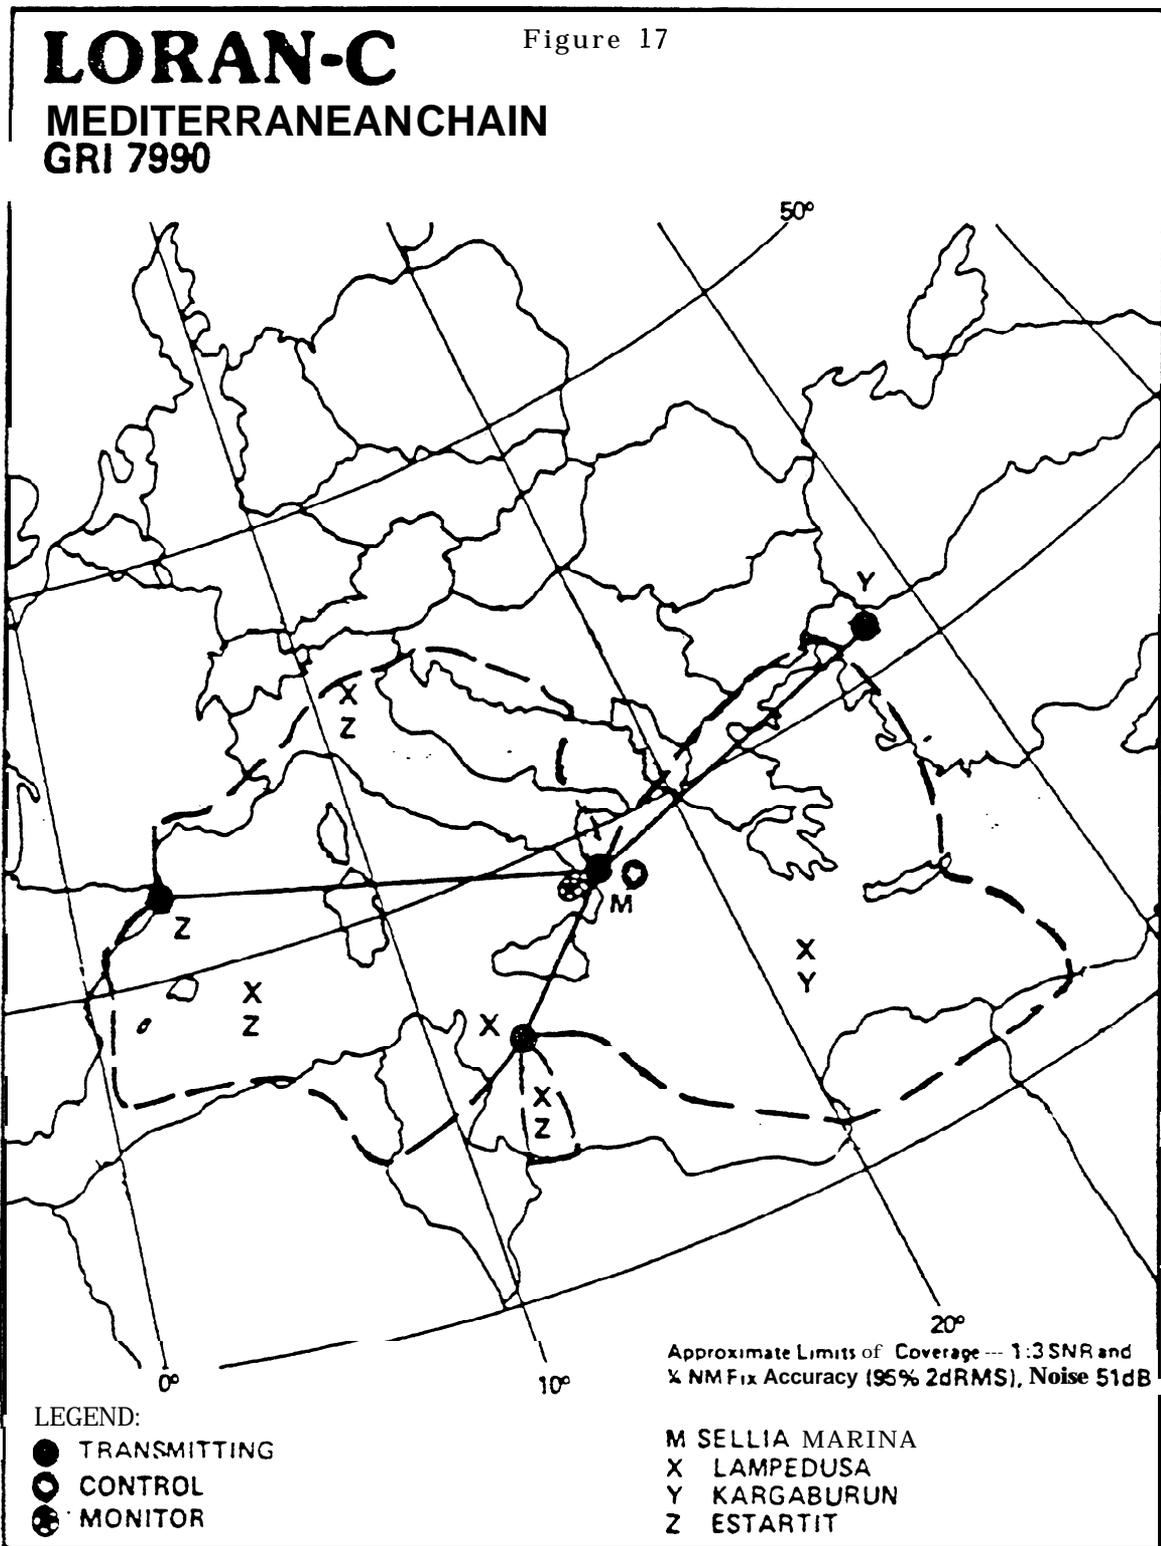


8/24/88

AT: 20-121A
Appendix 4

Figure 18


PROPOSED SOUTH CENTRAL U.S. CHAIN

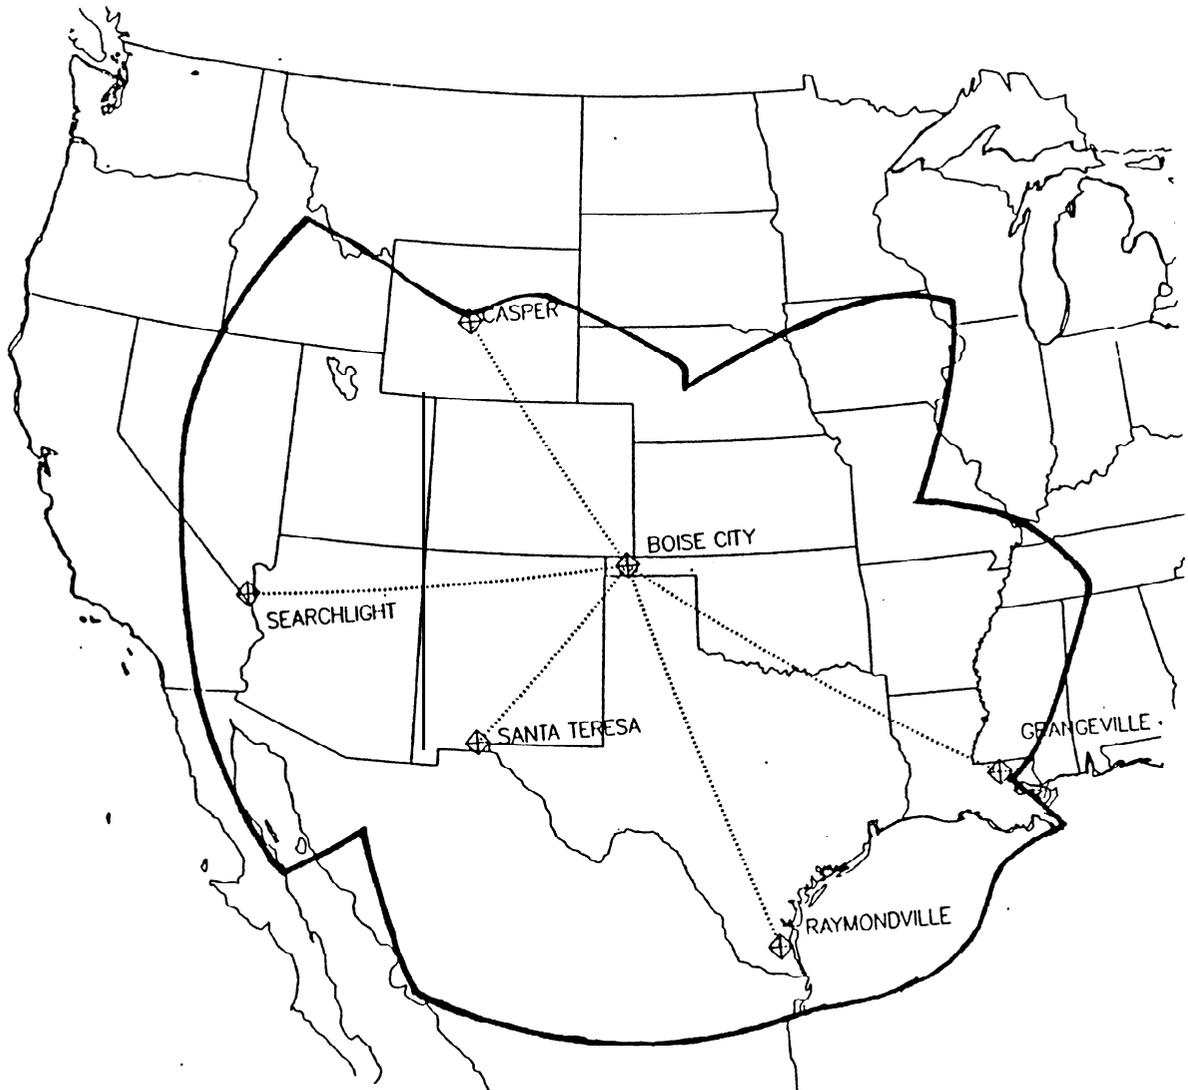

PREDICTED LORAN-C GROUNDWAVE COVERAGE
SOUTH CENTRAL U.S. (SOCUS) CHAIN
0.1 USEC TD STD DEV
0.25 NAUTICAL MILE 2DRMS
SNR 10DB NOISE 57DB ABOVE 1UV/M

Figure 19

PROPOSED NORTH CENTRAL U.S. CHAIN

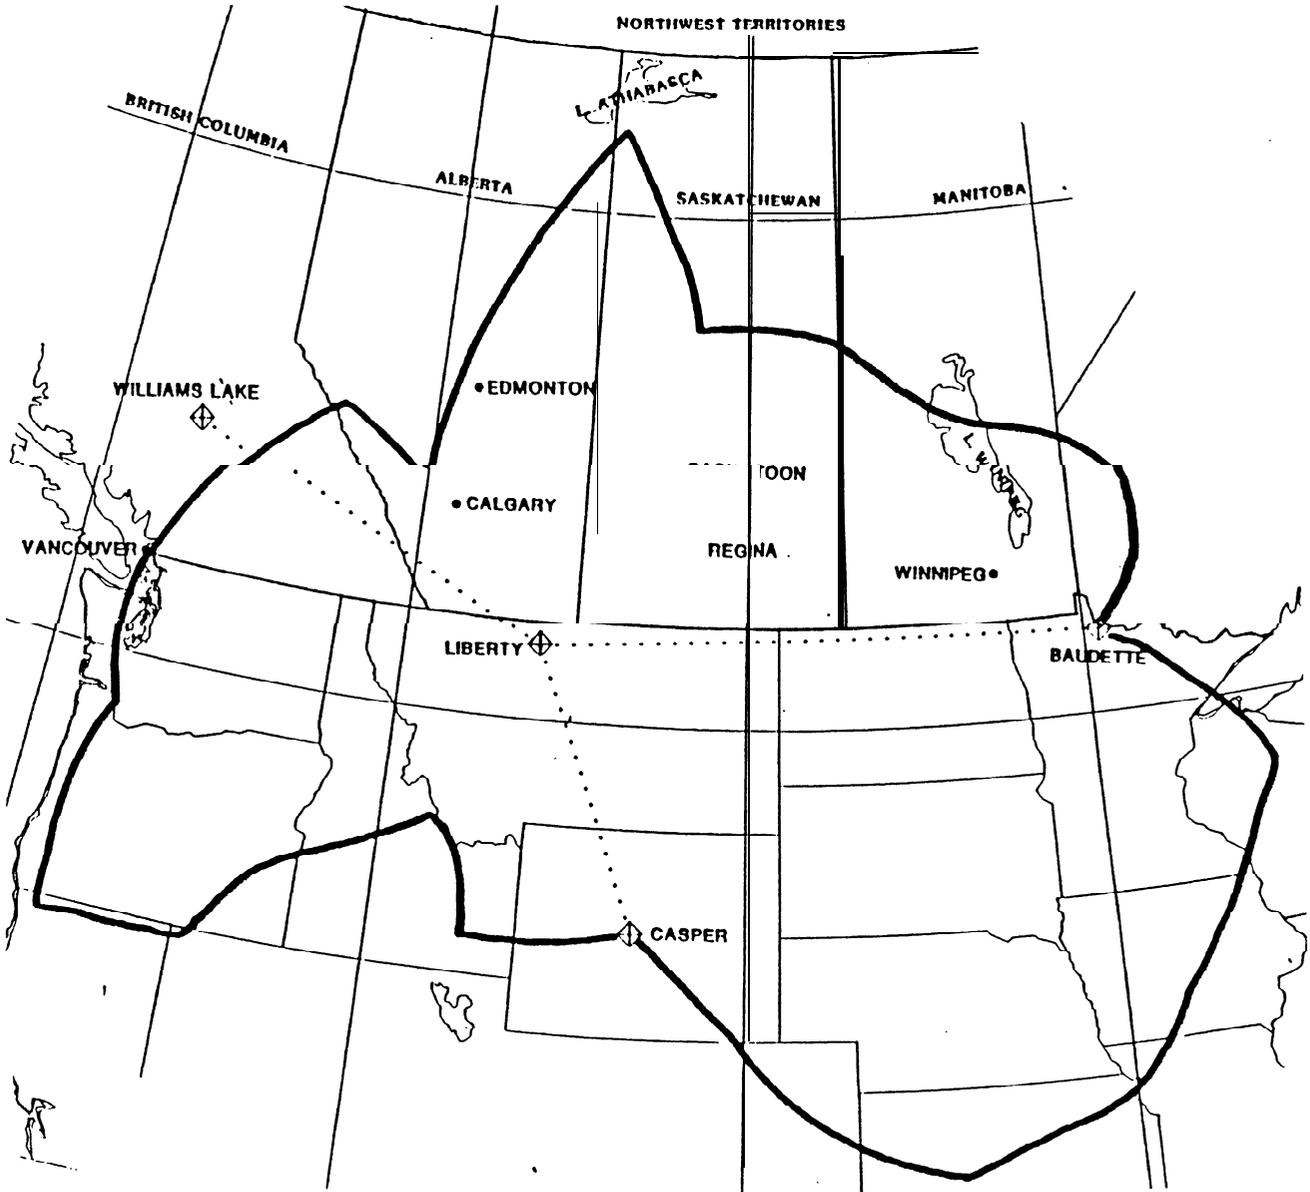

PREDICTED LORAN-C GROUNDWAVE COVERAGE
NORTH CENTRAL U.S. CHAIN (NOCUS)
0.1 USEC TD STD DEV
0.25 NAUTICAL MILE 20RMS
SNR 1008 NOISE 5308 ABOVE 10V/M